



10/01/97

A

**PATENT APPLICATION TRANSMITTAL LETTER**

Filed by Express mailing process

Docket Number (Optional)

none

To the Commissioner of Patents and Trademarks:

Transmitted herewith for filing under 35 U.S.C. 111 and 37 CFR 1.53 is the patent application of

Brad A. Armstrong

entitled GAME CONTROLLER WITH ANALOG PRESSURE SENSOR(S)

Enclosed are:

- ☒ 29 pages of written description, claims and abstract.
- ☒ 8 sheets of drawings.
- ☐ an assignment of the invention to \_\_\_\_\_
- ☒ executed declaration of the inventors.
- ☐ a certified copy of a \_\_\_\_\_ application.
- ☐ associate power of attorney.
- ☒ a verified statement to establish small entity status under 37 CFR 1.9 and 1.27.
- ☐ information disclosure statement
- ☐ preliminary amendment
- ☒ other: Copies of prior art documents and a PTO 1449 form

**CLAIMS AS FILED**

	NUMBER FILED	NUMBER EXTRA	RATE	FEE
BASIC FEE			\$	\$ 790.00
TOTAL CLAIMS	- 20 =	* 0	x \$	0
INDEPENDENT CLAIMS	- 3 =	* 3	x \$ 82	246.00
MULTIPLE DEPENDENT CLAIM PRESENT			\$	0
* NUMBER EXTRA MUST BE ZERO OR LARGER			<b>TOTAL</b>	\$ 1036.00
If applicant has small entity status under 37 CFR 1.9 and 1.27, then divide total fee by 2, and enter amount here.			<b>SMALL ENTITY TOTAL</b>	\$ 518.00

- ☒ A check in the amount of \$ 518.00 to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. \_\_\_\_\_ as described below. I have enclosed a duplicate copy of this sheet.
  - ☐ Charge the amount of \$ \_\_\_\_\_ as filing fee.
  - ☐ Credit any overpayment.
  - ☐ Charge any additional filing fees required under 37 CFR 1.16 and 1.17.
  - ☐ Charge the issue fee set in 37 CFR 1.18 at the mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).

October 1, 1997  
Date

Brad A. Armstrong  
Signature  
Brad A. Armstrong  
Typed or printed name  
P.O. BOX 1419, Paradise, CA 95967  
Address

Patent Application of  
Brad A. Armstrong  
for  
GAME CONTROLLER WITH ANALOG PRESSURE SENSOR(S)

5 BACKGROUND OF THE INVENTION

1. Field of the Invention:

The present invention relates to controllers of the type used and held by two hands simultaneously to control visual imagery shown on a visual display. More  
10 specifically, the present invention pertains to a two hand held controller with analog pressure sensor(s) for controlling video game machines and imagery thereof, and other electronically generated imagery. Methods of use and manufacturing are also disclosed.

15 2. Description of the related Prior Art:

There are many prior art game controllers for use in controlling imagery. A typical prior art game controller is shown in U.S. Patent 5,207,426 issued May 4, 1993 to Y. Inoue et al and assigned to Nintendo Co. Ltd. The  
20 Nintendo controller is a typical example of a game controller having multiple inputs capable of manipulating multiple-axes, such as with the included cross-shaped rocker key pad, and numerous buttons and depressible surfaces. The Nintendo controller includes a housing  
25 sized to be grasped and held simultaneously by two hands of a human user with thumbs of the grasping hands remaining free of grasping responsibilities; the housing including a right-hand area and a left-hand area, the right-hand area being an area for grasping by the user's  
30 right hand, the left-hand area being an area for grasping by the user's left hand; a plurality of depressible surfaces (e.g., buttons and cross-shaped key pad) each at least in-part supported by the housing and each at least

in-part exposed on the housing in at least one area for operation by the user's thumbs and fingers. The plurality of depressible surfaces (most of the depressible surfaces) are positioned on the housing to be within reach of the user's thumbs with the user's hands grasping the housing; each depressible surface or member of the plurality of depressible surfaces or members is individually operatively associated with an individual electricity manipulating device (e.g., a simple momentary On switch to close an opening in a circuit), one electricity manipulating device per each depressible surface of the plurality of depressible surfaces. Each electricity manipulating device (momentary On switch) is contained at least in-part within the housing and capable of electrical output manipulation upon physically applied depressive pressure on the associated depressible surface. The switches (electricity manipulating devices) are either On or Off and provide corresponding all or nothing outputs. These simple On/Off switches are not used to provide the user proportional or analog control.

Although there have been tens of millions of such prior art controllers as described above sold by numerous manufacturers despite the significant disadvantages of simple On/Off controls, I believe such a controller can be improved, so does Nintendo Co. Ltd. In a more recent game controller sold by Nintendo, referred to as the N64 controller, the controller has incorporated in a center portion a proportional joystick having rotary optical encoders to achieve the proportional effect. The proportional joystick is applied in an attempt to overcome the significant disadvantages of the four simple On/Off switches located under the typical cross-shaped rocker pad. The proportional joystick includes at least two major disadvantages which are overcome by the present invention. The first disadvantage is cost of manufacture, and the second is confusion of the user. In an controller

to be made in millions of units, two relatively expensive optical encoders, a complex gimble, multiple mechanical parts specific for the joystick, etc. creates an additional substantial cost which is very high. The  
5 second disadvantage is confusion of the user in that the typical user has become commonly accustomed to use of the cross-shaped key pad with the left thumb. The presentation of the option of the proportional joystick with the N64 controller often leads to confusion as  
10 whether to use the cross-shaped key pad or the joystick, especially for beginning users and potential buyers.

Clearly there is great advantage to the user's enjoyment of the game by allowing the user proportional or variable control.

15 The primary emphasis of this disclosure is to teach analog sensor(s) embodiment in a controller having only a single housing structured to be held in the user's two hands simultaneously. Nevertheless, a joystick type of controller can be greatly advantaged by embodiment of  
20 analog sensors as described herein. The joystick type controller may be held in two hands simultaneously but it is not a single housing held in two hands. Rather, a joystick includes two housings, a base housing and a handle housing neither of which are designed to be held in  
25 two hands simultaneously. The joystick type controller may be greatly advantaged by inclusion of depressible surfaces (buttons and/or triggers) operating analog sensors as described herein. Such embodiments will become apparent to those skilled in the art with a study of this  
30 disclosure. On the other hand, mouse type controllers have a single housing but the single housing is not designed to be held in two hands simultaneously and therefore such type controllers are not considered relevant to the present invention.

35 Other related prior art of which I am aware and believe to be cumulative to the aforementioned includes

the following U.S. Patent: 4,687,200 issued Aug. 18, 1987;  
 5,644,113 issued July 1, 1997; 5,602,569 issued Feb. 11,  
 1997; 4,469,330 issued Sept. 4, 1984; 5,459,487 issued  
 Oct. 17, 1995. Also U.S. Patents 5,565,891 issued Oct.  
 5 15, 1996 and 5,589,828 issued Dec. 31, 1996 to the present  
 Inventor.

The present invention solves the aforementioned  
 disadvantages and provides significant additional benefits  
 and advantages.

#### 10 SUMMARY OF THE INVENTION

The following summary and detailed description is of  
 preferred structures and best modes for carrying out the  
 invention, and although there are clearly variations which  
 could be made to that which is specifically herein  
 15 described and shown in the included drawings, for the sake  
 of brevity of this disclosure, all of these variations and  
 changes which fall within the true scope of the present  
 invention have not been herein detailed, but will become  
 apparent to those skilled in the art upon a reading of  
 20 this disclosure.

The present invention involves the use of structures  
 (pressure sensors) having pressure-sensitive variable-  
 conductance material across proximal circuit traces in  
 order to provide variable output for control of action  
 25 intensity of electronic imagery in proportion to applied  
 physical pressure in the depression of familiar control  
 surfaces of a two hand held game controller. Improved  
 methods pertaining to using and manufacturing game  
 controllers are also herein disclosed.

30 The applied physical pressure is provided by a user  
 of the present controller depressing a button or like  
 depressible surface (e.g., cross-shaped key pad) which  
 applies pressure onto pressure-sensitive variable-  
 conductance material which, dependant upon the applied  
 35 pressure, alters its conductivity (i.e., resistive or



rectifying properties dependant on pressure sensor material utilized) and thereby provides analog electrical output proportional to the applied pressure. The analog electrical output of the variable-conductance material is  
5 output to an image generation machine as a signal at least representational of the analog electrical output for controlling electronic imagery.

Examples of typical left thumb use of the invention (controller) in a game for control of action intensity of  
10 the electronic imagery can be to simply have a simulated character walk with low depressive pressure applied, walk faster with increased depressive pressure applied, and run with a relatively high depressive pressure applied to a single depressible surface of the controller in accordance  
15 with the present invention. The user can choose the action intensity of imagery by applying appropriate depressive pressure to depressible surfaces of the controller. In a second example, a race car can veer slightly with a low depressive pressure and turn sharply  
20 with a high depressive pressure. In an example of typical right thumb use (or finger of the right hand as is typical in joystick use) of the controller, variable depressive pressure can control variable fire rate of a gun or variable jumping height of a character, etc.

25 The present invention in one embodiment involves a game controller sized and shaped to be grasped and held simultaneously by two hands of a human user with thumbs of the grasping hands remaining substantially free of grasping responsibilities. The thumbs are used in  
30 depressing a plurality of depressible surfaces, the depressible surfaces each at least in-part exposed on the housing outer surface. A plurality of electricity manipulating devices are contained within the housing in operable association with the plurality of depressible  
35 surfaces for manipulating electrical outputs with depression by the thumbs (or fingers) of the plurality of

depressible surfaces and physical pressure applied by the depression. One or more of the electricity manipulating devices are analog pressure-sensitive variable-conductance electrical devices (sensors) for varying electrical output proportional to varying physical pressure applied by the user's thumb or fingers.

The controller of this disclosure, which can be used and manufactured as herein described, is a controller which the user holds or grasps in both hands simultaneously during operation (depressing of depressible surfaces) of the controller, and the two handed holding provides advantages for certain imagery manipulations which cannot be obtained with single hand held controllers such as a mouse. The ability to use and the actual use of two hands simultaneously on a controller allows what I call "full involvement" of the user, wherein the user can involve both hands in the control of imagery and utilizing, in general terms, the specialized abilities of the differentiated halves of his or her brain. Typically the left half of the brain of a user mostly controls the right arm and hand, and the right half of the brain mostly controls the left arm and hand. Generally speaking, for most users of a controller, it is much more intuitive and natural to use the right hand digits for certain types of control functions, such as for example, critical timing of functions such as those associated with firing a simulated gun, or precise timing in jumping of a simulated character of an electronic game. Typically, the left hand and digits are used to control functions which are more spatial in nature, such as for aiming functions which might be associated with steering a simulated car, airplane or controlling directional movement of a character such as the running direction of a simulated person. The present two hand held controller allows for placement of depressible control surfaces for certain functions in areas of the controller which are generally

most suitable for typical human users. Additionally, a two handed controller provides the user the advantageous ability to hold the controller in both hands with the controller in the user's lap or held in front of the user  
 5 and free of the constraints of needing a desk top or like surface on which to rest the controller.

An object of the present invention is to provide a game controller having thumb or finger (digit) depressible pressure-sensitive proportional (i.e. analog) control(s),  
 10 thus the user can control the action intensity of the game imagery by the degree of pressure exerted on a depressible surface.

Another object of the present invention is to provide the above in a structural arrangement familiar to current  
 15 game controller users, thus no secondary expensive proportional joystick is required when proportional controls are applied to a cross-shaped rocker key pad.

Another object of the present invention is to provide an inexpensive to manufacture analog input controller.

20 Another object of the present invention is to provide a game controller in which right hand thumb buttons may also be pressure-sensitive proportional (analog input) control(s).

Another object of the present invention is to provide  
 25 an improved method of using a game controller connected to an image generation machine with visual display, in which a user depresses depressible surfaces using hand digits on a game controller to manipulate imagery on the display, wherein depressing of at least one of the depressible  
 30 surfaces with varying degrees of pressure manipulates imagery of the display in proportion to the degree of depressive pressure.

Another object of the present invention is to provide a method of controlling action intensity of imagery within  
 35 a visual display of the type associated with an electronic game allowing user manipulation of action of imagery



within the visual display by way of depressing a depressible surface onto a pressure-sensitive variable-conductance sensor connected to electronics within a two hand held game controller linked to an image generation machine such as a game console or computer which in turn is linked to the display, and wherein depressing of a depressible surface with varying degrees of pressure varies the conductance of the pressure-sensitive variable-conductance sensor, thereby the action intensity of the imagery can be proportional to the degree of depressive pressure.

Another object of the present invention is to provide an improved method of manufacturing a two hand held type game controller including installing pressure-sensitive variable-conductance material for varying electrical output of circuitry in proportion to user applied pressure to a depressible surface.

These, as well as additional objects and advantages will become increasingly appreciated with continued reading and with a review of the included drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a traditional prior art game controller commonly referred to as a game pad having a left hand area and a right hand area with the left hand area having a cross-shaped rocker pad depressible in four codependant areas, under each area is an associated On/Off momentary On switch (electricity manipulating devices), four switches, one under each depressible area. The right hand area has depressible individual buttons located over On/Off momentary On switches (electricity manipulating devices).

Fig. 2 shows a Nintendo N64 prior art game controller. This controller illustrates the growing need for variable or analog input control in the incorporation of the complex rotary encoder joystick. This controller

has typical traditional right hand area depressible buttons and also a typical cross-shaped depressible rocker pad in the left hand area.

Fig. 3 shows a cross section view of a resilient dome cap mounted over a circuit board having a first and a second circuit trace including pressure-sensitive variable-conductance material in a sensor arrangement in accordance with the present invention.

Fig. 4 shows a top view of first and second conductive traces with finger-like traces laying opposed in proximity with one another.

Fig. 5 shows a cross sectional view of a resilient dome cap and pressure-sensitive variable-conductance material atop interdigitated traces on a circuit board in accordance with the present invention.

Fig. 6 shows a top view of first and second interdigitated circuit traces.

Fig. 7 shows a cross sectional view of a resilient dome cap supporting pressure-sensitive variable-conductance material above interdigitated traces on a circuit board in accordance with the present invention.

Fig. 8 shows the sensor of Fig. 7 in a depressed or activated state.

Fig. 9 shows an exploded view of one controller in accordance with the present invention.

Fig. 10 is a graph illustrating depressive pressure in relation or in proportion to the conductivity of a pressure sensor, which typically corresponds to action intensity of imagery on the game display.

Fig. 11 shows a game controller of a traditional format in accordance with the present invention for example. The game controller is shown connected by wires to an image generation machine (game console or personal computer) which drives a display such as a television or computer monitor.

## BEST MODES FOR CARRYING OUT THE INVENTION

Referring now to drawing figures 3-11 for descriptions of preferred embodiments and best modes for carrying out the invention. As previously mentioned, the present invention includes a game controller which is a two hand held controller sized and shaped to be grasped and held simultaneously by two hands of a human user with thumbs of the grasping hands remaining substantially free of grasping responsibilities so as to be available and useful in depressing a plurality of depressible surfaces 22 each at least in-part exposed on housing 20 to be accessible by the user's digits. A plurality of electricity manipulating devices 24 are contained (or at least in part contained) within housing 20 in operable association with the plurality of depressible surfaces 22 for manipulating electrical outputs with depression by the user's hand digits (thumbs or fingers) of the plurality of depressible surfaces 22. Electricity manipulating devices 24 in this disclosure can be any electrical device such as simple Off/On (momentary On) switches as are commonly used in prior art game controllers, but with the present invention at least one of the electricity manipulating devices 24 is an analog pressure-sensitive variable-conductance sensor 26 for varying electrical output proportional to varying physical pressure applied by the user's thumb or fingers on a depressible surface 22 positioned to apply pressure to pressure-sensitive variable-conductance material 36 of sensor 26 as will be detailed.

Shown in Fig. 3 is a pressure-sensitive variable-conductance sensor 26 or analog sensor as it may installed by a manufacturer within a game controller in accordance with the present invention. Resilient dome cap 28 is shown made of rubbery material, such as injection molded silicone rubber, mounted over a circuit board 30 having a first circuit trace 32 and a second circuit trace 34 and

including pressure-sensitive variable-conductance material 36 contacting both traces 32, 34, and an electrically conductive plate 38 is shown atop pressure-sensitive variable-conductance material 36. An underside portion of depressible surface 22 is shown atop dome cap 28. Dome cap 28 is a resilient dome providing a return spring lifting depressible surface 22 and provides or serves the purpose in this example of supporting depressible surface 22 raised upward until manually depressed to cause the lower or inner surface of dome cap 28 to press against plate 38 which in turn presses against pressure-sensitive variable-conductance material 36 which as will be detailed, changes its conductivity with applied pressure to alter the conductance of the electrical path provided thereby between the first and second conductive traces 32 and 34 which are in close proximity to one another yet separated. Sensor 26 can be used in replacement of a simple momentary On switch within a game controller wherein a momentary On switch simply closes the circuit across the first and second traces 32 and 34 while the user presses on depressible surface 22 and the closed circuit outputs a known and fixed output (On or Off, or open or closed), while with the application of sensor 26 depressing of depressible surface 22 provides variable electrical flow across the first and second circuit traces 32, 34 varying in proportion to the degree of depressive pressure applied by the user's thumb or finger on the top or upper exposed portion of depressible surface 22. Such an arrangement allows a voltage/current to be applied to first circuit trace 32 wherein current flows from first circuit trace 32 through pressure-sensitive variable-conductance material 36 into conductive plate 38 through pressure-sensitive variable-conductance material 36 and into second circuit trace 34. Voltage/current can be regulated and varied by way of applied physical pressure such as onto plate 38 to compress material 36 which alters

the conductivity of the circuit at least in-part defined by circuit traces 32 and 34.

Pressure-sensitive variable-conductance material 36 is an important aspect of the present invention. Variable  
5 conductance can be achieved with materials having either variable resistive properties or variable rectifying properties. For the purpose of this disclosure and the claims, variable-conductance means either variably resistive or variably rectifying. Material having these  
10 qualities can be achieved utilizing various chemical compounds or formulas some of which I will herein detail for example. Additional information regarding such materials can be found in U.S. patent 3,806,471 issued to R.J. Mitchell on April 23, 1974 describing various  
15 feasible pressure-sensitive variable-conductance material formulas which can be utilized in the present invention. While it is generally anticipated that variable resistive type active materials are optimum for use in the pressure sensor(s) in the present invention, variable rectifying  
20 materials are also usable.

An example formula or compound having variable rectifying properties can be made of any one of the active materials copper oxide, magnesium silicide, magnesium stannide, cuprous sulfide, (or the like) bound together  
25 with a rubbery or elastic type binder having resilient qualities such as silicone adhesive or the like.

An example formula or compound having variable resistive properties can be made of the active material tungsten carbide powder (or other suitable material such  
30 as molybdenum disulfide, sponge iron, tin oxide, boron, and carbon powders, etc.) bound together with a rubbery or elastic type binder such as silicone rubber or the like having resilient qualities. The active materials may be in proportion to the binder material typically in a rich  
35 ratio such as 80% active material to 20% binder by volume ranging to a ratio 98% to 2% binder, but can be varied



widely from these ratios dependant on factors such as voltages to be applied, level or resistance range desired, depressive pressure anticipated, material thickness of applied material 36, surface contact area between material 36 and conductive traces such as traces 32 and 34, whether an optional conductive plate such as plate 38 is to be used, binder type, manufacturing technique and specific active material used.

A preferred method of manufacture for portions of that which is shown in Fig. 3 is to create a sheet of pressure-sensitive material 36 adhered to a conductive sheet such as steel, aluminum or copper, for example, by applying a mixture of the still fluid material 36, before the binder material has cured to the conductive sheet in a thin even layer. After the binder material (material 36) has cured and adhered to the conductive sheet, a hole punch is used to create circular disks of the lamination of the conductive sheet (plate 38) and material 36. The disks may then be secured to the circuit board and in contact with circuit traces 32 and 34. Securing may be accomplished with the use of adhesives such as the same binder such as silicone rubber or adhesive as used in the formula to make material 36.

Depressible surface 22 can be a button 40 style depressible member such as shown in Figs. 9 and 11, or depressible surface 22 can be an end portion of a four-way rocker or four-way key pad 42 as shown in Figs. 9 and 11. For further clarity, depressible surface 22 and electricity manipulating device 24 are herein described and shown as separate elements, but they are only necessarily separate in a functional sense (i.e., physical depressing function verses electrical controlling function). In practical application, depressible surface 22 and electricity manipulating device 24 may be structured as one part. For example, the upper part of dome cap 28 protruding through housing 20 could itself be

exposed to contact by a hand digit to function as the depressible surface 22 as shown for example in Figs. 7 and 8.

Fig. 4 shows first and second electrically conductive traces 32, 34 with finger-like traces laying in proximity with one another which can be the form of the first and second conductive traces 32, 34 of Fig. 3. The spacings between the conductive finger-like trace elements shown in Fig. 4 allow for adhesive which can be used to adhere a layer or disk of pressure-sensitive variable-conductance material 36 to circuit board 30 if so desired by the manufacturer.

Shown in Fig. 5 is a second pressure-sensitive variable-conductance sensor 26 or analog sensor embodiment as it may installed by a manufacturer within a game controller useful with the present invention. Resilient dome cap 28 is mounted over circuit board 30 having first and second circuit traces 32, 34 and including pressure-sensitive variable-conductance material 36 contacting both traces 32, 34. Optional plate 44 is shown atop pressure-sensitive variable-conductance material 36. An underside portion of depressible surface 22 is shown atop dome cap 28. Depressible surface 22 is shown in-part supported by housing 20, which in this example is housing 20 providing lateral support against the side of surface 22 and additionally with surface 22 including a lower flange abutting the underside of housing 20 and thereby being prevented from escaping housing 20. Optional plate 44 in this arrangement can be a stiff plate utilized as a physical load distributor to distribute compressive loads received from the underside of dome cap 28 with depression of depressible surface 22 across material 36 and not be an electrical conductor, or alternatively it can also be an electrical conductor dependant upon the particular thickness of material 36 and or spaced distance between circuit traces 32 and 34 beneath material 36. Plate 44

does not have to be applied atop material 36 in all  
embodiments. Circumstances which effect the determination  
as to whether plate 44 or conductive plate 38 for that  
matter are used atop material 36 include: the particular  
5 formula of material 36; dimensions of the applied material  
36; the size, shaped proximity and layout of the circuit  
traces in contact with material 36, and manufacturing  
considerations such as is material 36 directly applied to  
plate 44 or 38 in an easily handled disk and then adhered  
10 to the circuit board 30, or applied directly to circuit  
board 30 and traces 32, 34 such as by application in a  
fluid mixture (uncured) using a removable mask; or  
directly injected onto circuit board 30 such as with  
injection molding; or a pill/disk of material 36 is sliced  
15 from a cured cylinder or extrusion of material 36 and the  
pill/disk adhered to circuit board 30 and/or traces 32,  
34; and other manufacturing techniques.

Fig. 6 shows a top view of closely interdigitated  
circuit traces 32 and 34 in a form as may likely be used  
20 in the sensor structures shown in Figs. 5, 7 and 8.

Shown in Figs. 7 and 8 is a third pressure-sensitive  
variable-conductance sensor 26 or analog sensor embodiment  
as it may installed by a manufacturer within a game  
controller or used by a user of the game controller in  
25 accordance with the present invention. Rubber dome cap 28  
is mounted over circuit board 30 having first and second  
circuit traces 32, 34 and including pressure-sensitive  
variable-conductance material 36 on the bottom side of  
resilient dome cap 28. An upper exposed portion of dome  
30 cap 28 is exposed exterior of housing 20 so that  
depression by a thumb or finger of depressible surface 22  
causes downward movement or depression of dome cap 28 to  
bring material 36 into contact with traces 32 and 34.  
Depressible surface 22 is shown in-part supported or  
35 laterally stabilized by housing 20. Material 36 is not  
permanently contacting traces 32 and 34 as is shown in

Fig. 3 and 5, but instead is on the underside of dome cap 28 in pill or disk form and raised or held upward above traces 32, 34 by dome cap 28 until, as indicated in Fig. 8, surface 22 is depressed to push dome cap 28 downward to bring material 36 into contact with traces 32, 34 which, under pressure, establishes a conductive path across traces 32, 34. Also shown in Figs. 7 and 8 is the surface of material 36 which contacts traces 32 and 34 is convexed which in this particular application provides for the apex of the surface to first contact across traces 32 and 34 followed by material 36 which is flexible deforming with additional applied pressure to somewhat flatten-out and contact additional surface area of both traces 32 and 34. This arrangement of relatively lower initial surface area contact followed by additional or a larger surface area contact with further depression can provide additional conductivity changes due to not only the inherent conductivity changes brought about by pressure applied to material 36 but also by establishing additional current paths possible by the additional surface contact area. Material 36 in Fig. 7 and 8 can be formed with a flat bottom surface and function adequately without the increasing surface area effect provided by the convexed shape shown. Additionally sensors 26 of Figs. 3, 5, 7 and 8 will function within the scope of the invention absent the spring return effect of dome cap 28 wherein material 36 shown in Fig. 7 would be resting upon traces 32 and 34 and actuated by depression of surface 22.

In the prior art, typically a carbon-rich conductive pill or disk is located on the underside of a typical dome cap such as dome cap 28. In the prior art carbon-rich conductive pills are employed as simple On/Off momentary On switches wherein the pill is depressed by the user onto and across circuit traces to close the circuit and released to open the circuit. In the prior art, the carbon-rich pill is a component of a switch that is only

an On/Off switch. The prior art carbon-rich conductive pill is commonly used exclusively as an improved On/Off switch with the improvement being that this is considered a bounce-less switch not subjecting the circuitry to rapid on/off oscillations at the time of initial depression. Carbon-rich pills are made of granular carbon in high concentrations in a silicone rubber binder producing a resilient conductive material resistant to mechanical bouncing when depressed onto a surface. The carbon-rich pill is utilized to advantage in a simple On/Off bounce-less switch.

Such a carbon-rich pill, to my knowledge, has never been used or anticipated to be used for an analog sensor to provide action intensity control of electronic imagery. Neither, to my knowledge, has such a carbon-rich pill ever been used or anticipated to be used for an analog sensor in a two hand held game controller. I have discovered that such a carbon-rich pill or disk can be used, in a novel manner as taught herein, as an analog sensor in a game controller to provide action intensity control of electronic imagery such as that associated with electronic games. However, a narrow range of resistivity change found in a typical prior art carbon-rich pill as a function of depressive pressure exerted makes it not an ideal choice as an analog sensor in a human hand operated controller.

In the range of light depression by a typical user's thumb or finger (i.e., approximately one to six ounces) a carbon-rich pill as a variable resistor may typically have a range of resistance from a high value of approximately 3 thousand ohms to a low value near 10 ohms, which is a narrow range compared to a tungsten carbide based material 36 which may typically have a range from approximately 3 million ohms down to a low of approximately 10 ohms. Thus, the tungsten carbide based material 36 has a range of nearly 3 million ohms, while the carbon-rich pill has a



range of nearly 3 thousand ohms, resulting in an improvement of three magnitudes (i.e., one thousand times) in range of the tungsten carbide material 36 over the carbon-rich pill.

5 Tungsten carbide having an extreme resistance range as a function of physical depressive pressure allows for greater variation (higher resolution) of physical pressure applied within those levels normal to light use by the thumb or finger of a typical human user. The variable  
10 resistance range of tungsten carbide is additionally quite stable over a wide temperature range. Tungsten carbide also has excellent wear characteristics and minimal hysteresis. Therefore, tungsten carbide is a preferred active material for use with the present invention.

15 Within the scope of the invention, material 36 can be manufactured and fixed in place with numerous processes not yet detailed, and for example, tungsten carbide can be mixed with un-crosslinked silicone rubber and extruded from a tool or pressed into a cylindrical mold, allowed to  
20 crosslink, and then cut or sliced into disks or pills of material 36 which can then be placed in appropriate location to circuit traces 32, 34 or on dome cap 28. Another process is to mix tungsten carbide or other suitable material with an injection moldable silicone  
25 rubber and then inject the material onto any desireable surface such as a membrane surface such as mylar, or circuit board 30 and traces 32, 34, or using an injection process for creating dome cap 28 with disks or pills of material 36 thereon, such as could be performed for the  
30 dome cap 28 and material 36 arrangement of Fig. 7 and 8, or dome cap 28 can be a flexible/resilient dome cap and material 36 can be molded either onto the dome cap or onto the circuit board, etc. If a metal dome cap is used and is electrically conductive, one circuit trace such as  
35 trace 32 can make electrical contact with a foot of the dome cap and the second trace below the approximate center

of the dome cap with material 36 positioned between the second trace and the center of the dome cap such that depression of the dome cap effectively sandwiches material 36.

5        Fig. 9 shows an exploded view of a controller in accordance with one embodiment of the present invention. Shown at the top of the view is an upper portion 50 of housing 20. Upper portion 50 of housing 20 includes on the right hand side a pair of circular holes 52 for  
10        receiving and in-part supporting (retaining) depressible surfaces 22 which in this example are buttons 40. On the left hand side of the housing top is a cross-shaped opening 54 through the housing for in-part receiving and supporting a four-way rocker 42 which is a depressible  
15        surface 22. The depressible surfaces when assembled into the housing are in-part exposed on the housing surface for depressing by the digits of the human hands. Shown below the housing upper portion 50 is rocker 42 and buttons 40. Additionally shown are individual rubber dome caps 28  
20        beneath button 40 and a four-gang rubber dome cap 28 beneath rocker 42 having four codependant areas. Shown beneath the rubber dome caps is circuit board 30 having on its left side an array of circuit traces forming four areas including adjacent circuit traces 32 and 34 in close  
25        proximity to one another for operative engagement with material 36 installed by the manufacturer atop each of the four areas which are located such that the four-gang rubber dome cap can be applied over the four locations of material 36 to provide a dome cap over each material 36  
30        location. Rocker 42 can then be located atop the four-gang rubber dome cap so that one dome cap is located underneath each one of the four arm structures (four codependant areas) of rocker 42. Each arm of rocker 42 is placed one arm above each of the four locations of  
35        material 36. Rocker 42 is supported elevated above material 36 by dome caps, and when housing 20 is fully

assembled with a lower portion 56 of housing, a flange 58 on the lower outward edge of rocker 42 prevents rocker 42 from completely passing through cross-shaped hole 54. Shown on the right side of circuit board 30 are two  
5 locations of applied material 36 installed by the manufacturer over separated yet in close proximity to circuit traces 32 and 34. The two individual dome caps 28 will be placed one over each material 36 location of the right side of the board 30, and button 40 positioned onto  
10 dome caps 28, the upper surfaces of buttons 40 positioned through holes 52 and housing 20 and circuit board 30 connected to one another and housing 20 closed with upper portion 50 and lower portion 56 affixed together. Also shown on circuit board 30 is circuit traces 32 and 34  
15 connecting to active electronics 46 installed by the manufacturer and electronics 46 having the capacity to output a signal at least representational of the analog electrical output of pressure-sensitive variable-conductance sensor(s) 26 into output cable 48 leading to  
20 an image generation machine 60 such as a game console or computer connected to a display (Fig. 11). Active electronics 46 (i.e., ASIC or micro-controller integrated circuitry, etc.) which in addition to having normal circuitry of a typical game controller such as a prior art  
25 controller also has circuitry for interpreting the analog output of sensor material 36 and converting it into a digital signal (if a digital signal is desired) which is output to a host graphic generation machine via cable 48. For the sake of brevity and because it is well known to  
30 those skilled in the art, this disclosure does not detail converting analog to digital signals, i.e., specifically converting the output of sensors 26 to a digital signal or form for control of imagery. It is conceivable that within the scope of the invention, circuit traces 32 and  
35 34 could simply be connected directly to conductors of cable 48 for outputting a signal at least representational

of the analog electrical output of pressure-sensitive variable-conductance sensor(s) 26 through output cable 48 into an image generation machine 60 wherein active electronics 46 may be located.

5        Fig. 10 shows an idealized graph indicating conductivity of pressure-sensitive variable-conductance sensor such as sensor 26 and the corresponding action intensity of imagery in a game machine as a function of depressive pressure exerted by the thumb or fingers  
10        (digit) onto the depressible surfaces of a game controller as herein described. The graph shows that with a low depressive pressure, the conductivity is also low (resistivity high), and action intensity of imagery would normally be arranged to be low since the typical user will  
15        normally naturally associate low applied pressure with low action intensity. As depressive pressure increases so also increases the conductivity (resistivity lowering) proportionally in a smooth continuous change or analog manner so as to provide a variable electrical output.

20        Examples of typical left thumb use of the invention in a game can be to simply have a simulated character shown on the display walk with low depressive pressure applied to a depressible surface 22 of sensor 26, walk faster with increased depressive pressure applied to the  
25        depressible surface 22, and run with a relatively high depressive pressure applied to the same depressible surface 22, with this being an example of controlling or changing the action intensity of the imagery proportionally with changes in depressive pressure applied  
30        to depressible surface 22 of sensor 26. The user can choose the action intensity of imagery by applying appropriate depressive pressure. In a second example, a race car can veer slightly with a low depressive pressure applied to surface 22 of sensor 26 and turn sharply with a  
35        high depressive pressure applied to the same depressible surface 22. In a typical right thumb use and an example

of use of the invention, variable depressive pressure can control variable fire rate of a gun or variable jumping height of a character shown as an image on display 62. Alternatively, the invention in combination with an  
5 electronic game console or PC and display can be arranged so the action intensity of the imagery is reduced proportionally to increases or increasing depressive pressure applied on depressible surface 22 of sensor 26 wherein a simulated race car shown on the display travels  
10 at a high rate with little or no depressive pressure applied to surface 22, and is slowed proportionally to increased or increasing depressive pressure applied by the user to the depressible surface 22 of sensor 26, an arrangement wherein the sensor 26 is applied as a braking  
15 system.

Fig. 11 shows a game controller of a traditional format in accordance with the present invention for example. The game controller is shown connected by cable 48 to an image generation machine 60 such as a game  
20 console or personal computer which drives a display 62 such as a television, computer monitor or head-mount display, etc.

Although I have very specifically described preferred structures and best modes (methods) of the invention, it  
25 should be understood that the specific details are given for example to those skilled in the art. Many changes in the described specifics can clearly be made without departing from the scope of the invention, and therefore it should be understood that the scope of the invention is  
30 not to be overly limited by the specification and drawings given for example, but is to be determined by the spirit and scope and broadest possible interpretation of the attached claims.



I claim:

1. An improved controller of the type held in two hands simultaneously for controlling electronic imagery, said controller including a housing, a plurality of depressible surfaces at least in-part exposed on said housing with the depressible surfaces acting on electricity manipulating devices contained within said housing and controlled by depression of said depressible surfaces for manipulating electrical outputs at least useful for controlling electronic imagery; wherein the improvement comprises;
- at least one of said electricity manipulating devices is a pressure-sensitive variable-conductance sensor for creating an analog electrical output proportional to varying physical pressure applied to at least one depressible surface of the plurality of depressible surfaces;
- means for outputting to an image generation machine a signal at least representational of said analog electrical output, whereby a user of said controller may be provided proportional control of action intensity of electronic imagery.
2. An improved controller in accordance with claim 1 wherein the controller has only a single said housing, said housing structured to be held by two hands simultaneously.
3. An improved controller in accordance with claim 2 wherein at least four of said electricity manipulating devices are pressure-sensitive variable-conductance sensors for creating said analog electrical output proportional to varying physical pressure applied to at least four of said depressible surfaces of said plurality of depressible surfaces.

4. An improved controller in accordance with claim 3 wherein said at least four of said depressible surfaces comprises a four-way rocker having four codependant areas with each one of said areas positioned over one each of  
 5 said four electricity manipulating devices, one said area per one said electricity manipulating device.

5. A game controller structured to be held by a user in two hands simultaneously, said controller comprising:  
 a housing;  
 10 a plurality of depressible surfaces exposed on said housing and depressible by digits of the user's hands to operate  
 electricity manipulating devices contained within said housing and operated for manipulating electrical  
 15 outputs of said electricity manipulating devices by depression of said depressible surfaces; at least one of said electricity manipulating devices including  
 means for creating an analog electrical output proportional to varying physical pressure applied by at  
 20 least one depressible surface of the plurality of depressible surfaces;  
 means for outputting to an image generation machine a signal at least representational of said analog electrical output, whereby a user of said controller may be provided  
 25 proportional control of action intensity of electronic imagery.

6. A game controller in accordance with claim 5 wherein the controller has only a single said housing, said housing structured to be held by two hands  
 30 simultaneously.

7. A game controller in accordance with claim 6 including at least four of said electricity manipulating devices including means for creating said analog

electrical output proportional to varying physical pressure applied to at least four of said depressible surfaces of said plurality of depressible surfaces.

8. A game controller in accordance with claim 7  
 5 wherein said at least four of said depressible surfaces comprises a four-way rocker having four codependant areas with each one of said areas positioned over one each of said four electricity manipulating devices, one said area per one said electricity manipulating device.

10 9. A game controller comprising  
 a housing to be grasped and held simultaneously by two hands of a human user with thumbs of the grasping hands remaining free of grasping responsibilities; said housing including a right-hand area and a left-hand area,  
 15 said right-hand area being an area for grasping by the user's right hand, said left-hand area being an area for grasping by the user's left hand;  
 a plurality of depressible surfaces each at least in-part exposed on said housing in at least one said area,  
 20 said plurality of depressible surfaces positioned on said housing to be within reach of the user's thumb with the user's hand grasping said housing in said at least one said area;  
 a plurality of electricity manipulating devices each  
 25 individually operatively associated with a single depressible surface of said plurality of depressible surfaces, one of the electricity manipulating devices per each one of the depressible surfaces; each of the electricity manipulating devices contained at least in-  
 30 part within said housing and capable of electrical output manipulation upon physically applied depressive pressure of its associated depressible surface of said plurality of depressible surfaces;

at least one said electricity manipulating device

including means for creating an analog electrical output proportional to varying applied physical pressure;

means for outputting to an image generation machine a signal at least representational of said analog electrical output, whereby a user of said controller may be provided proportional control of action intensity of electronic imagery.

10. A game controller in accordance with claim 9 including at least four of said electricity manipulating devices including means for creating said analog electrical output proportional to varying physical pressure applied by at least four of said depressible surfaces of said plurality of depressible surfaces.

11. A game controller in accordance with claim 10 wherein said at least four of said depressible surfaces comprises a four-way rocker having four codependant areas with each one of said areas positioned over one each of said four electricity manipulating devices, one said area per one said electricity manipulating device.

12. An improved method of using a game controller of the type structured to be held by a user in two hands simultaneously, the controller connected to an image generation machine connected to a visual display, in which a user's hand digits depress surfaces upon a housing of the controller to manipulate imagery on the display, wherein the improvement includes;

depressing at least one of said surfaces with varying degrees of pressure to manipulate imagery in proportion to the degree of depressive pressure.

13. An improved method in accordance with claim 12 further including grasping said housing in each of two hands

simultaneously when depressing at least one of said surfaces.

14. An improved method of controlling action intensity of imagery within a visual display of the type  
 5 allowing user manipulation of action of imagery within the visual display by way of depressing a depressible surface onto a pressure-sensitive variable-conductance sensor connected to electronics within a housing of a two-hand held controller linked to an image generation machine  
 10 which in turn is linked to the display; wherein the improvement includes the step

depressing said depressible surface with varying degrees of pressure to vary conductance of said pressure-sensitive variable-conductance sensor for varying the  
 15 action intensity of the imagery proportional to the degree of depressive pressure.

15. An improved method in accordance with claim 14 further including

grasping said housing in each of two hands  
 20 simultaneously when depressing at least one of said depressible surfaces.

16. An improved method of manufacturing a two-hand held type controller manufactured by way of assembling into a housing a circuit board including circuitry formed  
 25 to be at least in-part a component of electricity manipulating devices and applying single digit depressible surfaces in-part exposed on said housing and positioned to be depressed onto said electricity manipulating devices, wherein the improvement comprises;

30 installing into said controller at least one pressure-sensitive variable-conductance sensor for creating an analog electrical output in proportion to pressure applied to at least one of said depressible



surfaces;

installing into said controller means for outputting  
to an image generation machine a signal at least  
representational of said analog electrical output for  
5 providing a user of the controller proportional control of  
action intensity of electronic imagery.

17. An improved method of manufacturing a two-hand  
held type controller in accordance with claim 16 further  
including forming said housing into a single structure  
10 suitable for being held by two hands of a user  
simultaneously.

18. An improved method of manufacturing a two-hand  
held type controller in accordance with claim 17 further  
including installing into said controller said at least  
15 one pressure-sensitive variable-conductance sensor of a  
type having a wide variable resistance range as a function  
of depressive pressure.

19. An improved method of manufacturing a two-hand  
held type controller in accordance with claim 18 further  
20 including installing into said controller said at least  
one pressure-sensitive variable-conductance sensor of a  
type having an active material of tungsten carbide within  
an elastic binder.

## ABSTRACT OF THE DISCLOSURE

A game controller of the type held in two hands simultaneously for controlling electronic games, including a housing, a plurality of depressible surfaces at least in-part exposed on the housing with the depressible surfaces in operational association with electricity manipulating devices contained within the housing and controlled by depression of the depressible surfaces for manipulating electrical outputs at least useful for controlling electronic games. At least one of the electricity manipulating devices is a pressure-sensitive variable-conductance sensor for creating an analog electrical output proportional to varying physical pressure applied to at least one depressible surface. The analog electrical output is output as a signal at least representational of the analog electrical output to an image generation machine for controlling electronic imagery. Also disclosed are methods of use and manufacture of game controllers having at least one pressure-sensitive analog sensor.

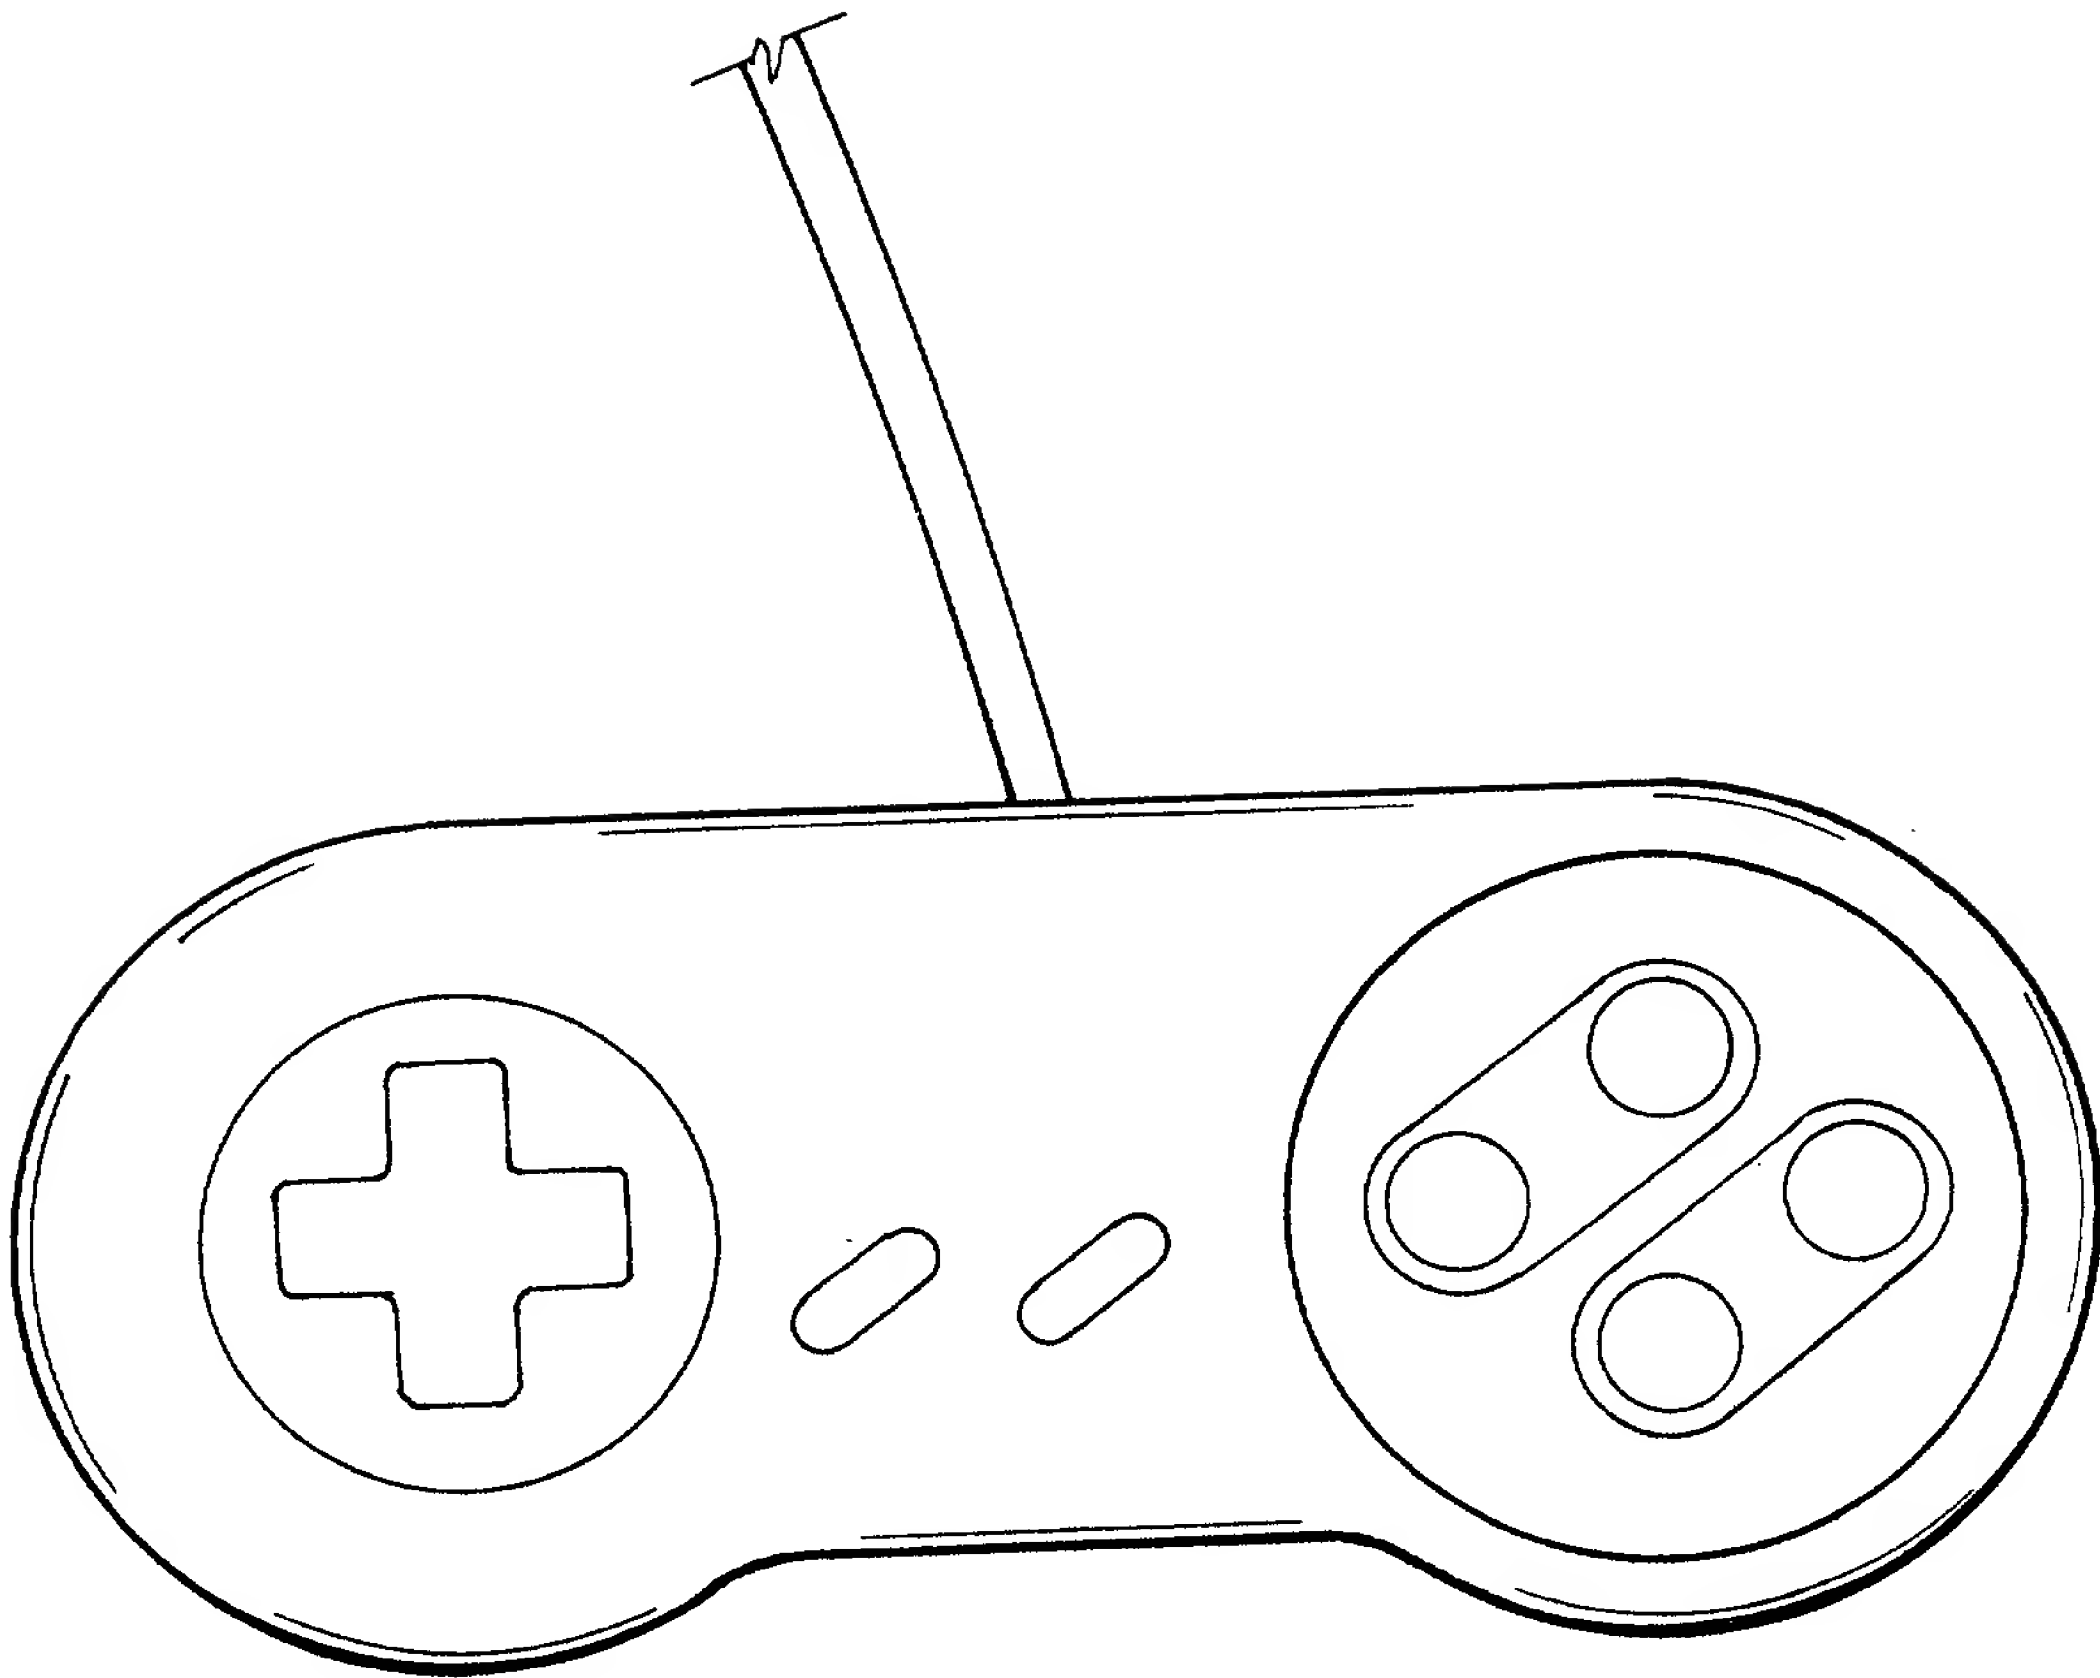


FIG. 1

PRIOR ART

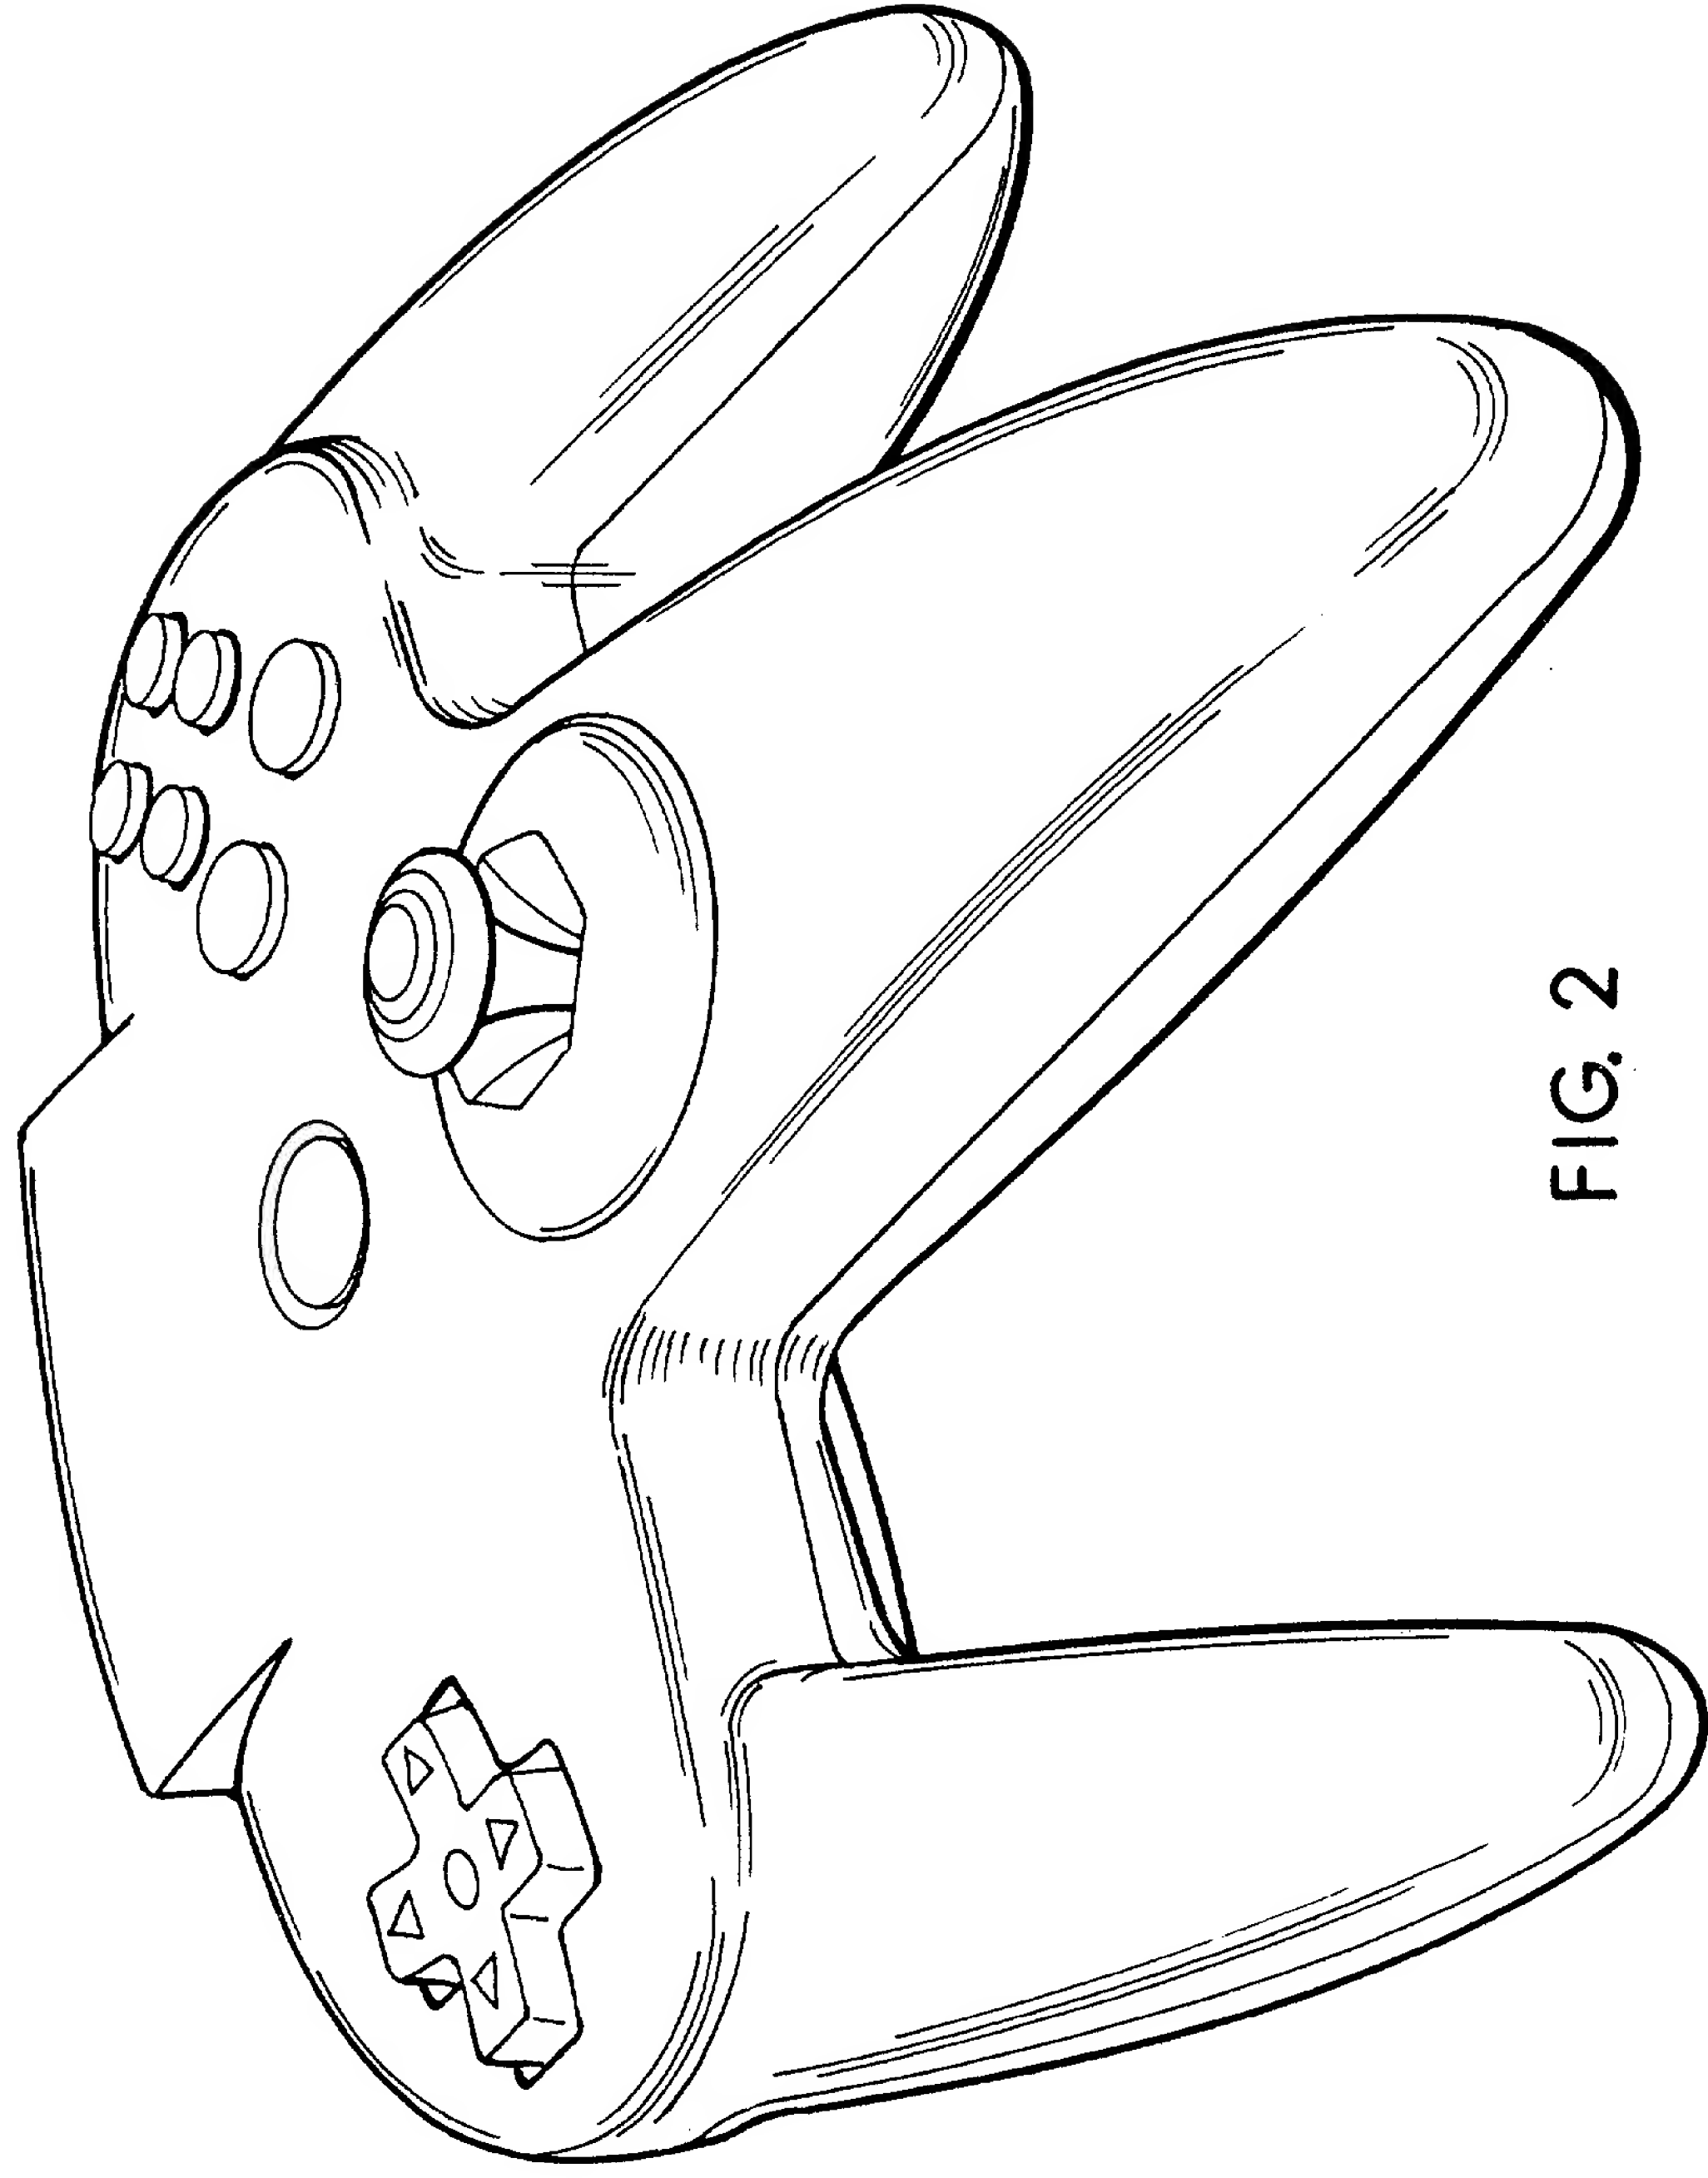
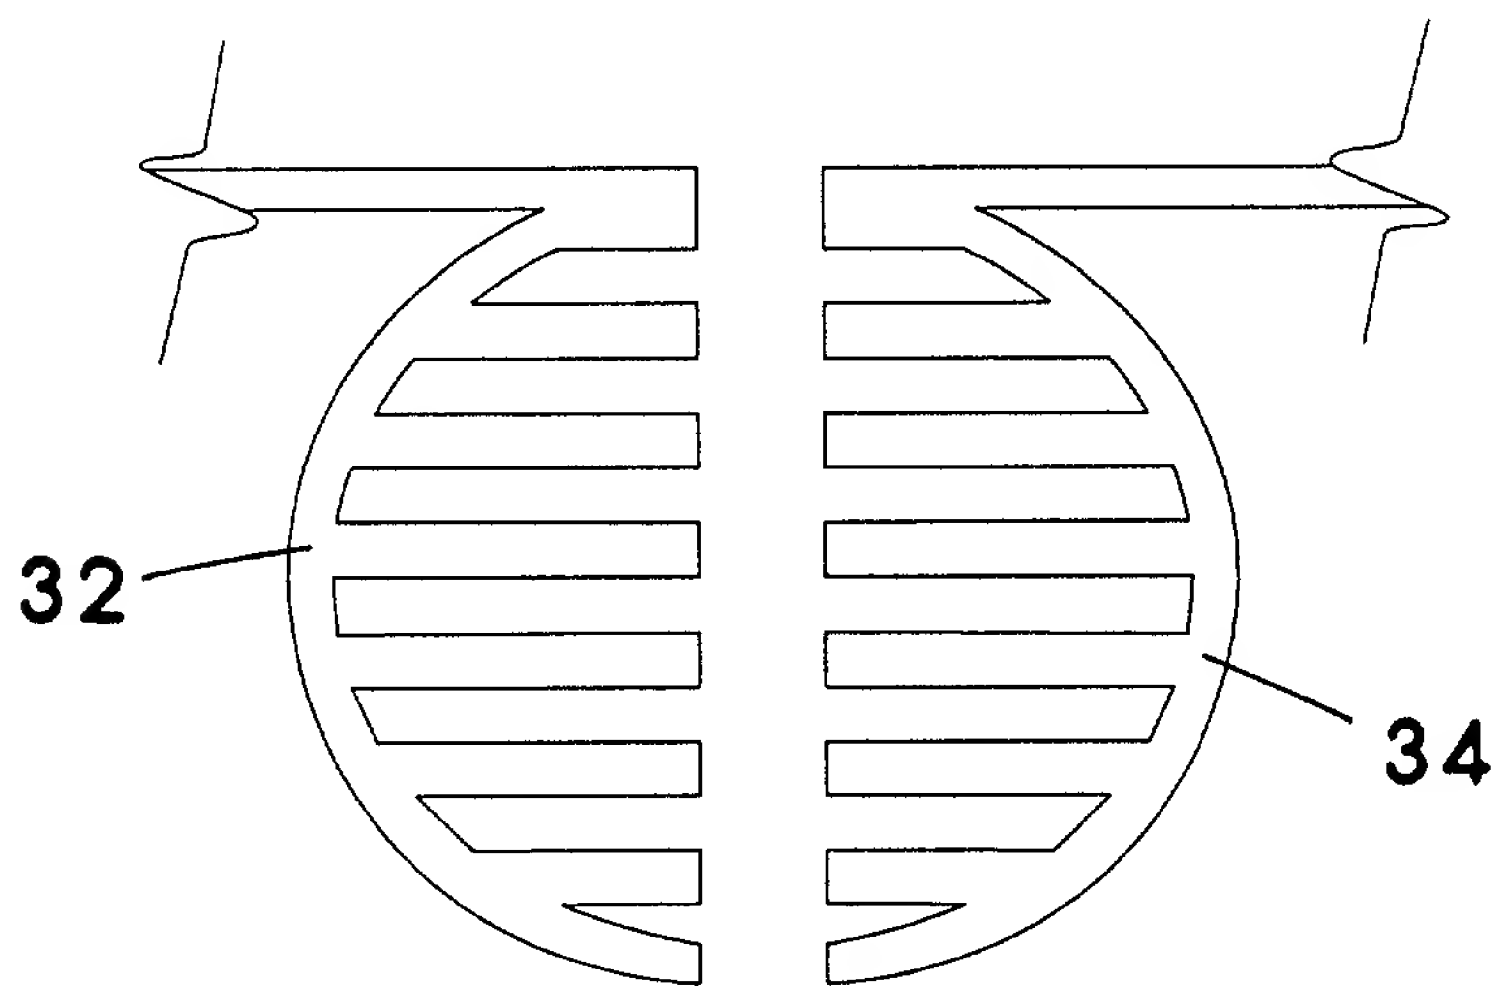
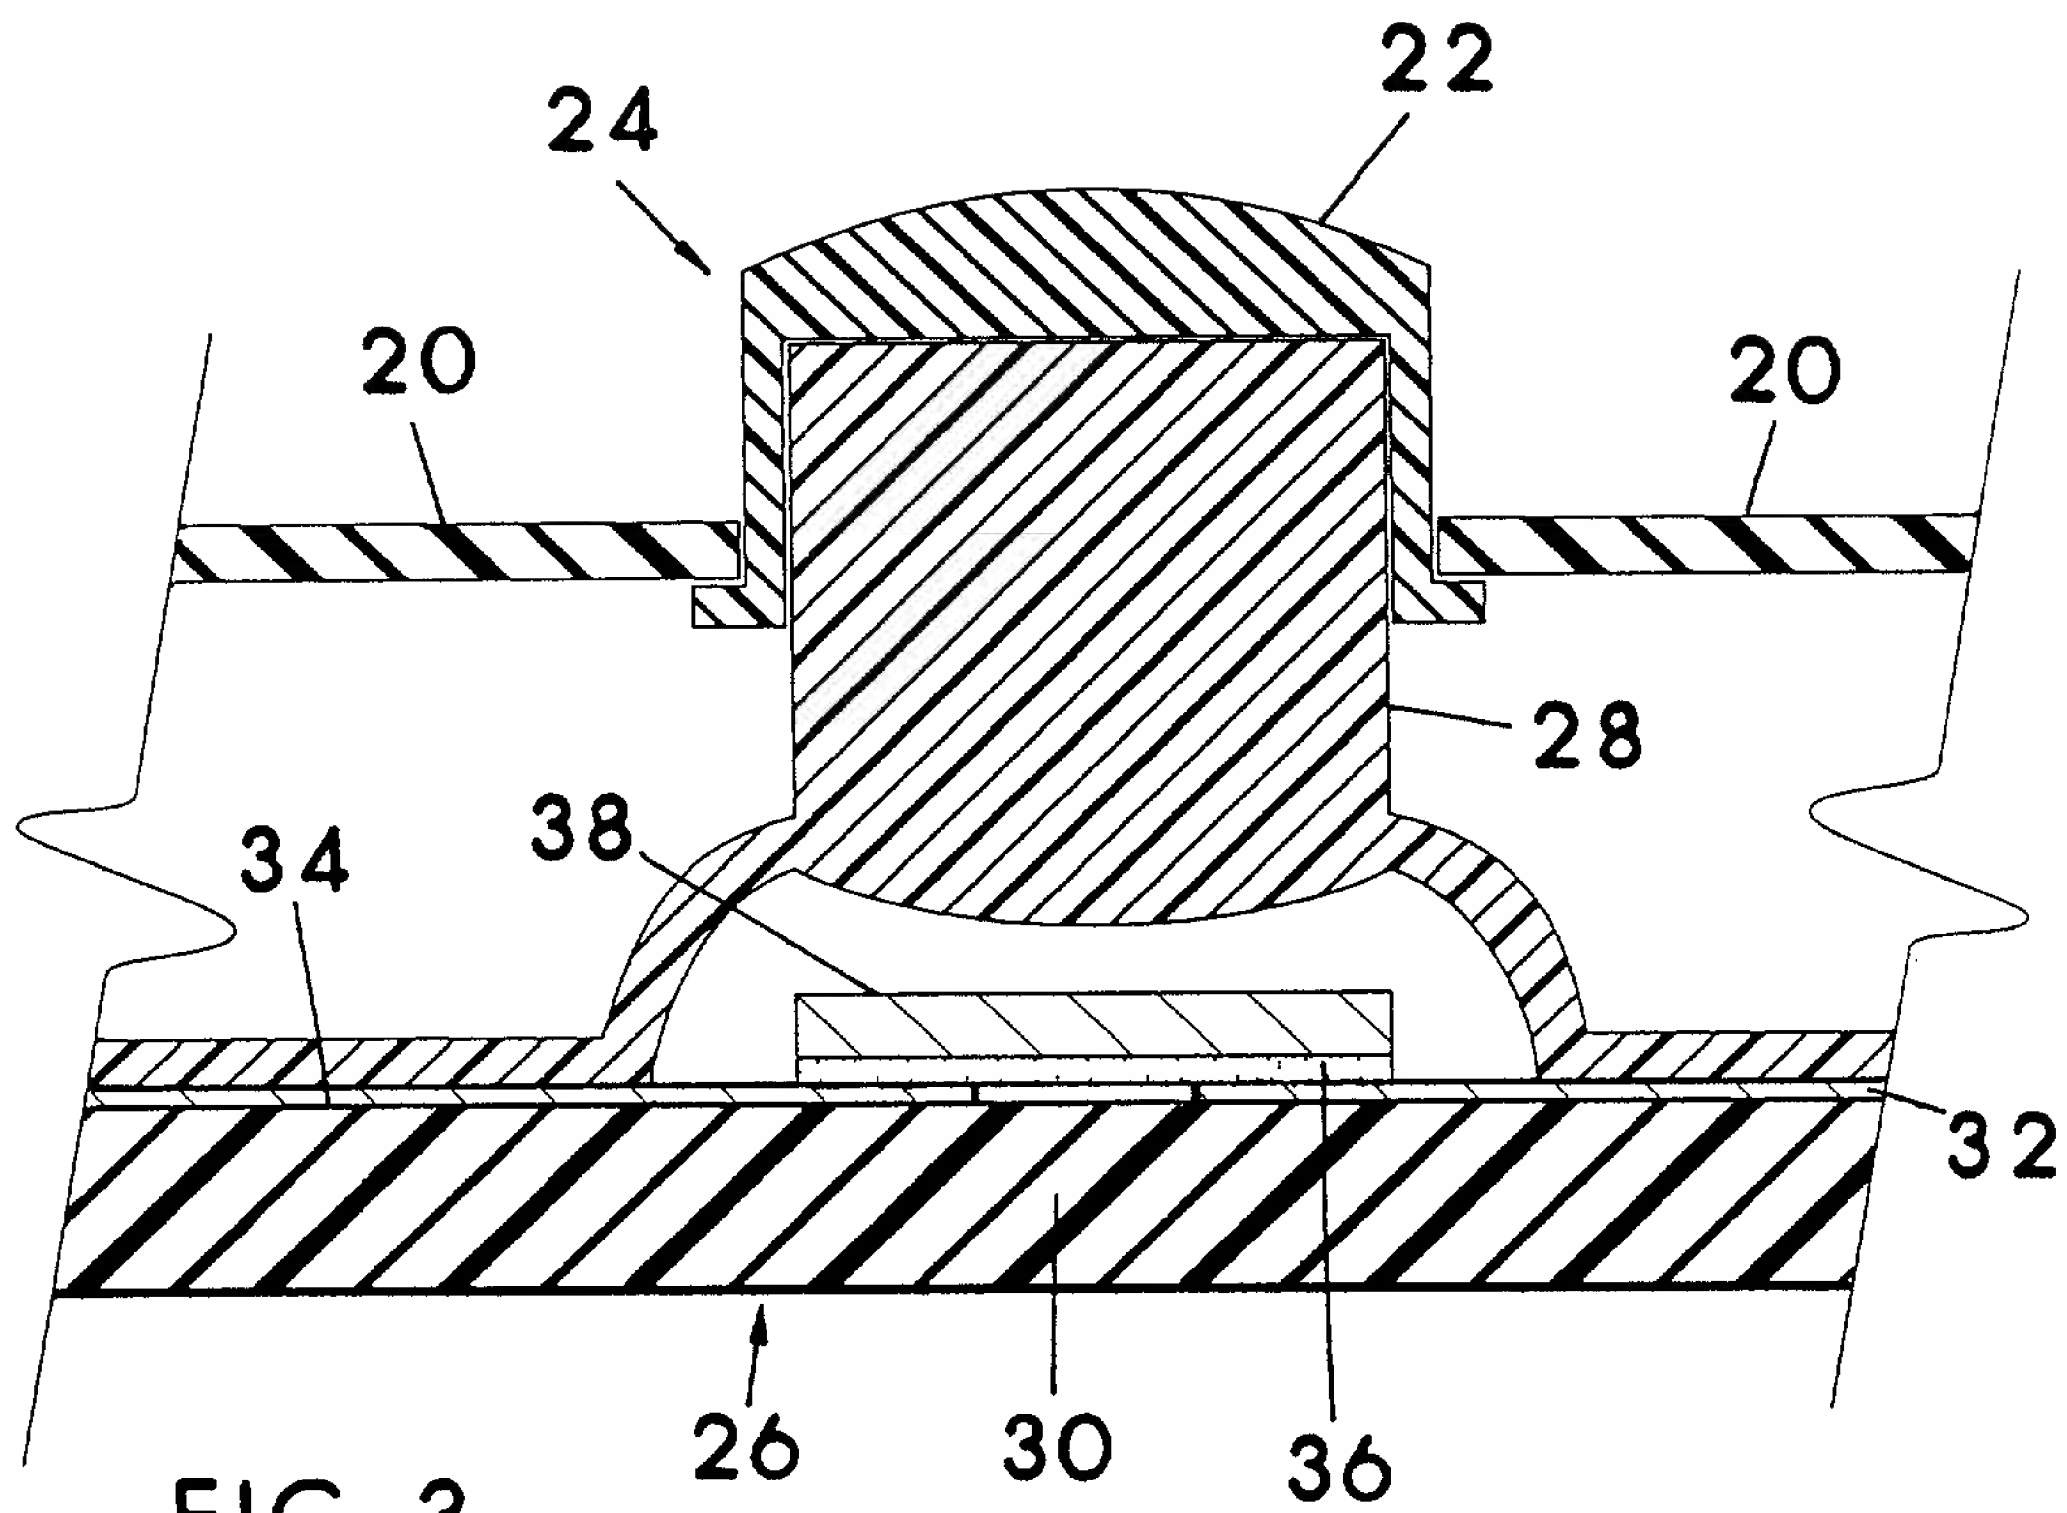
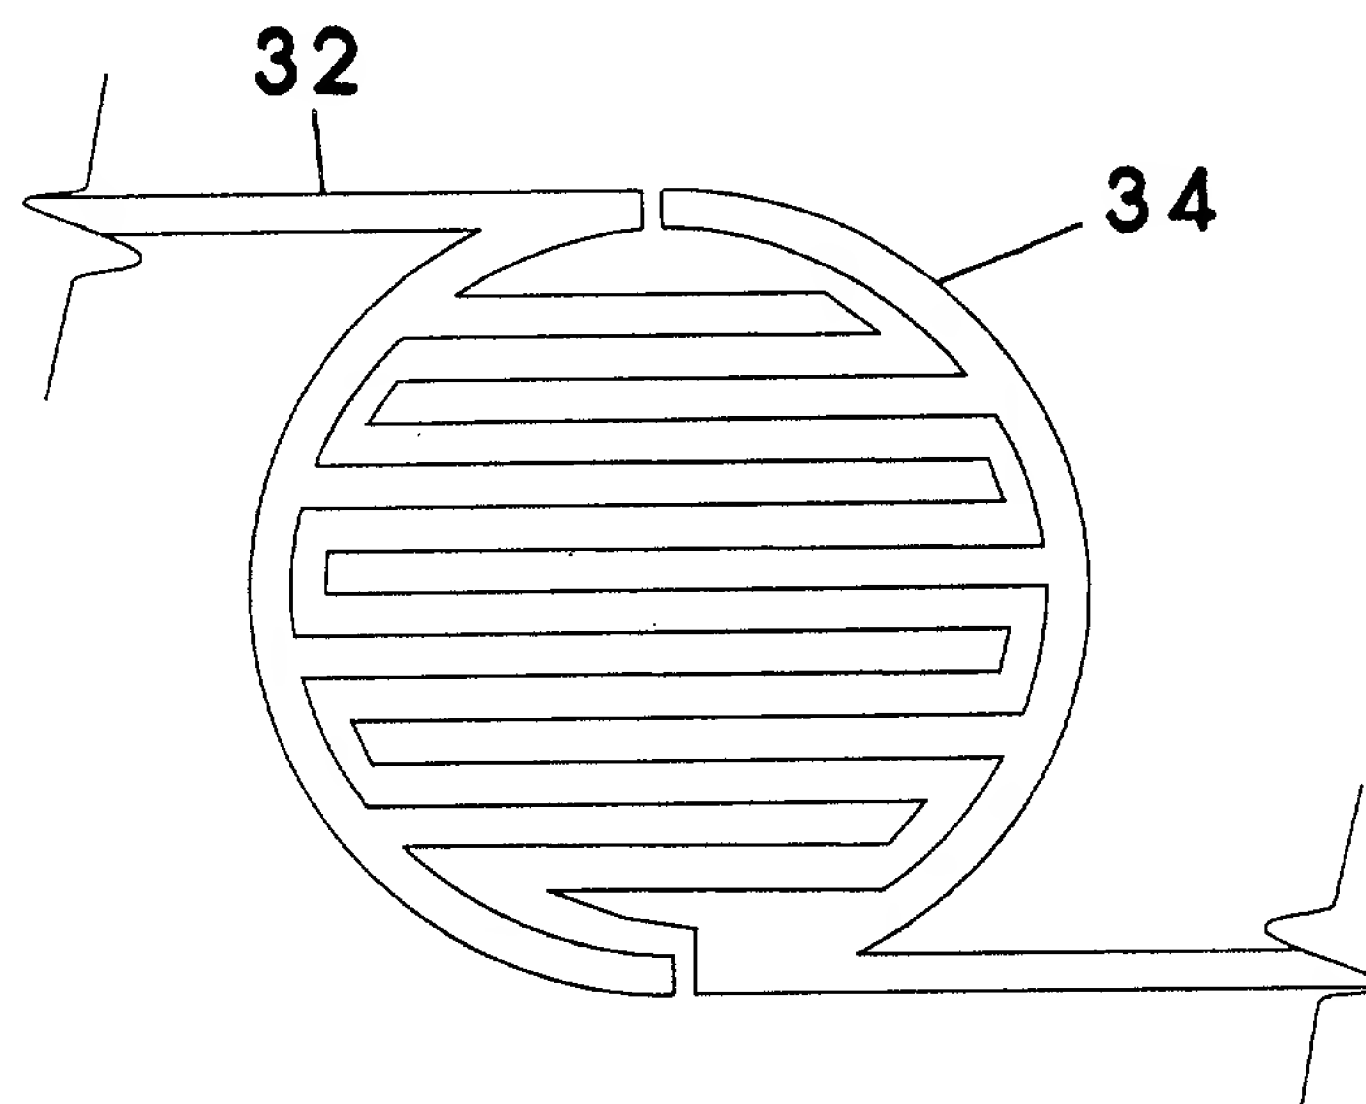
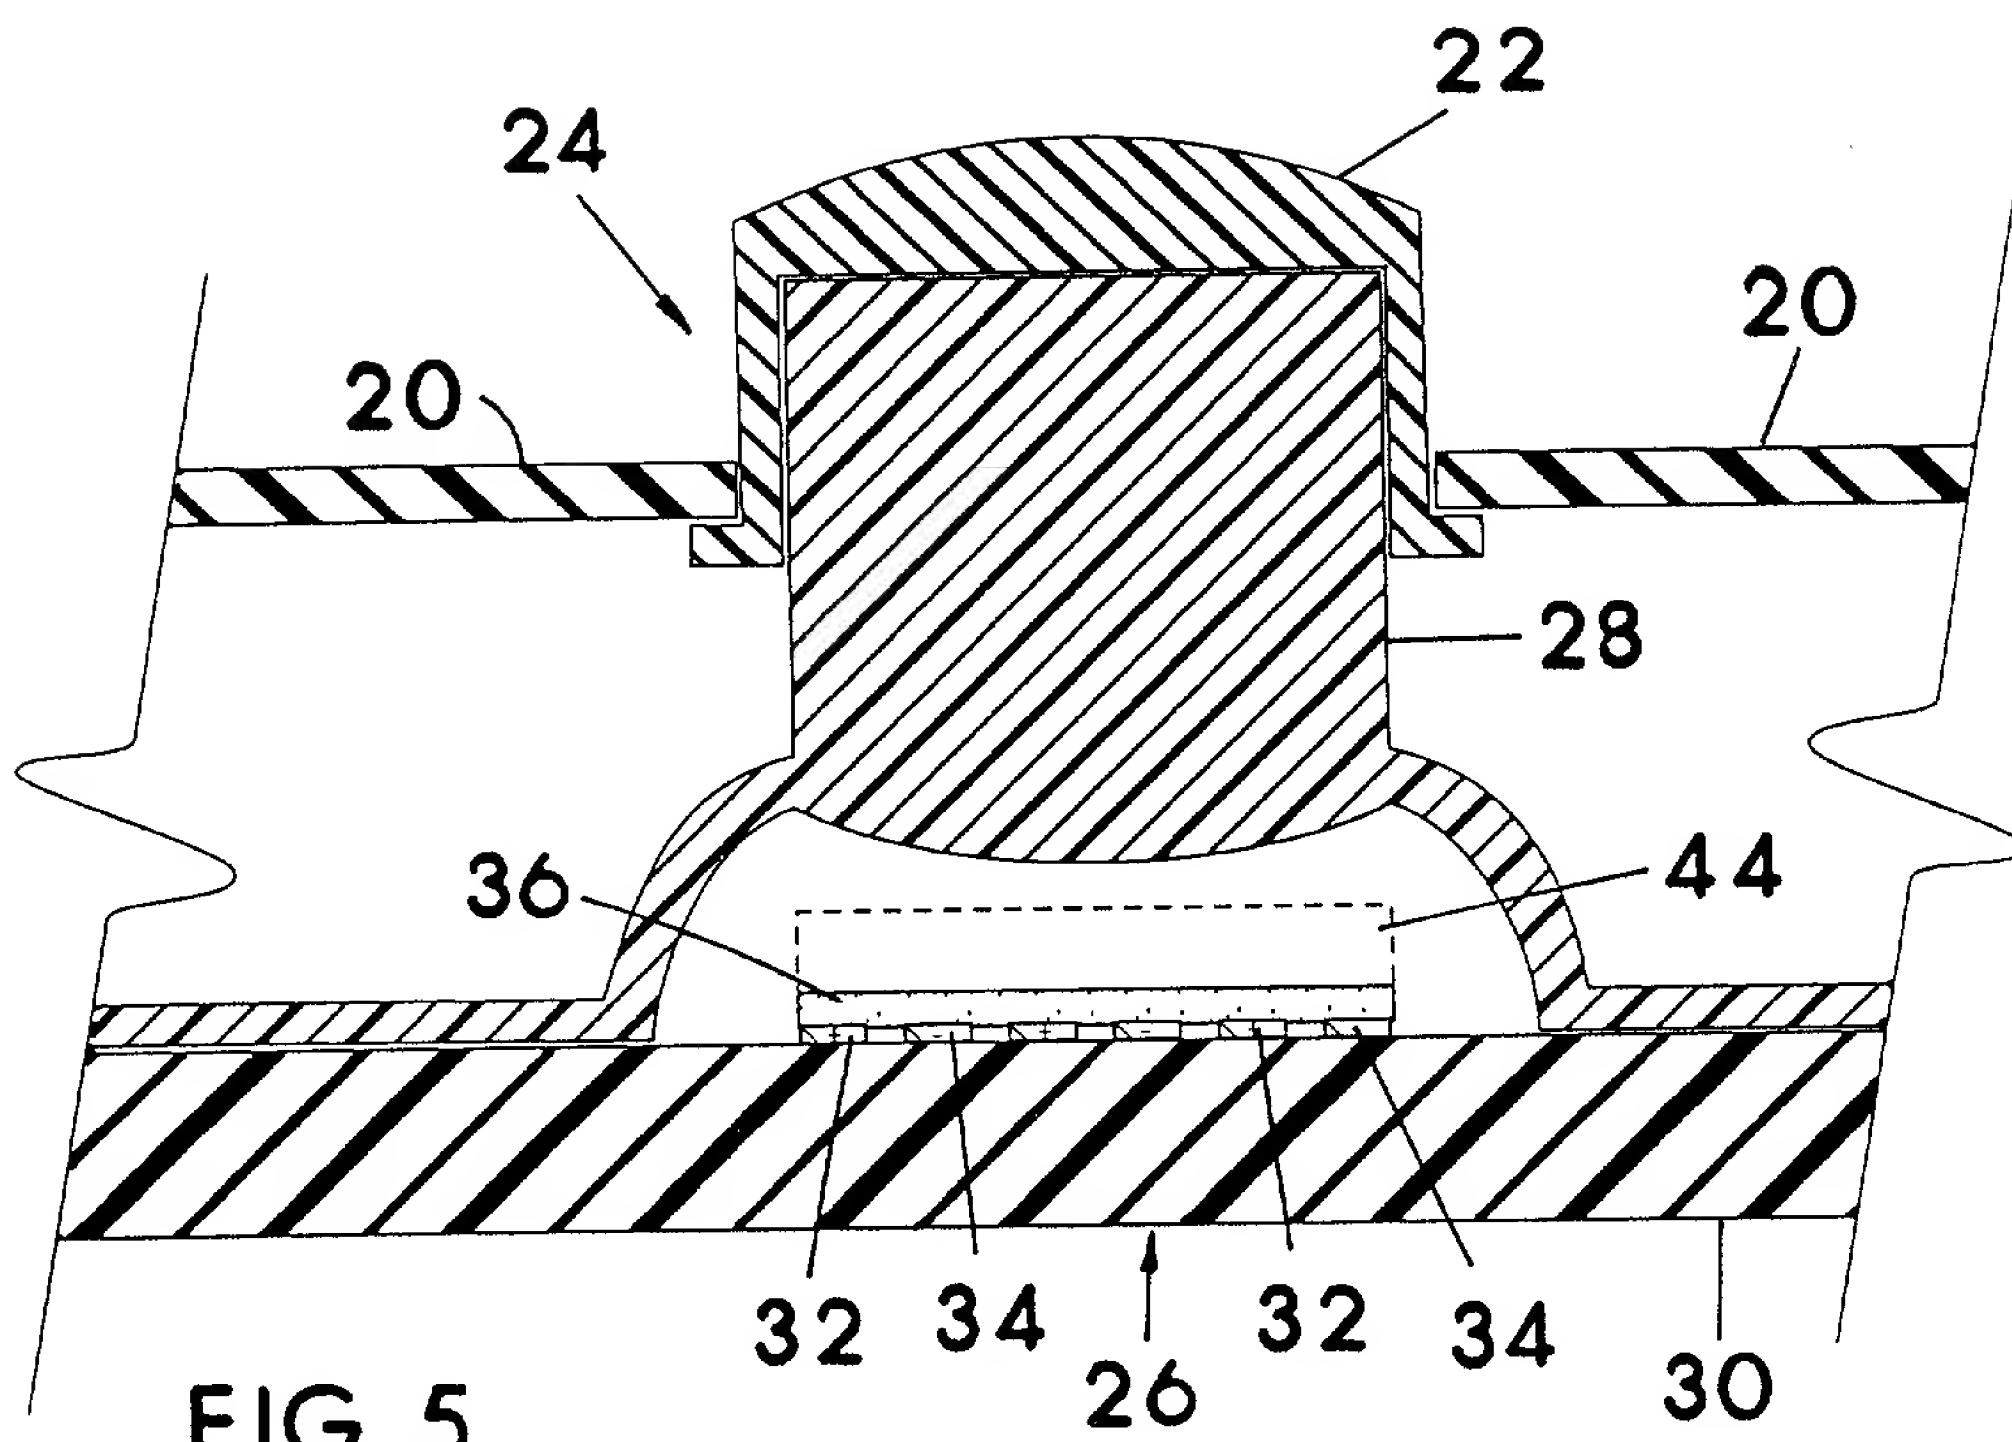




FIG. 2

PRIOR ART







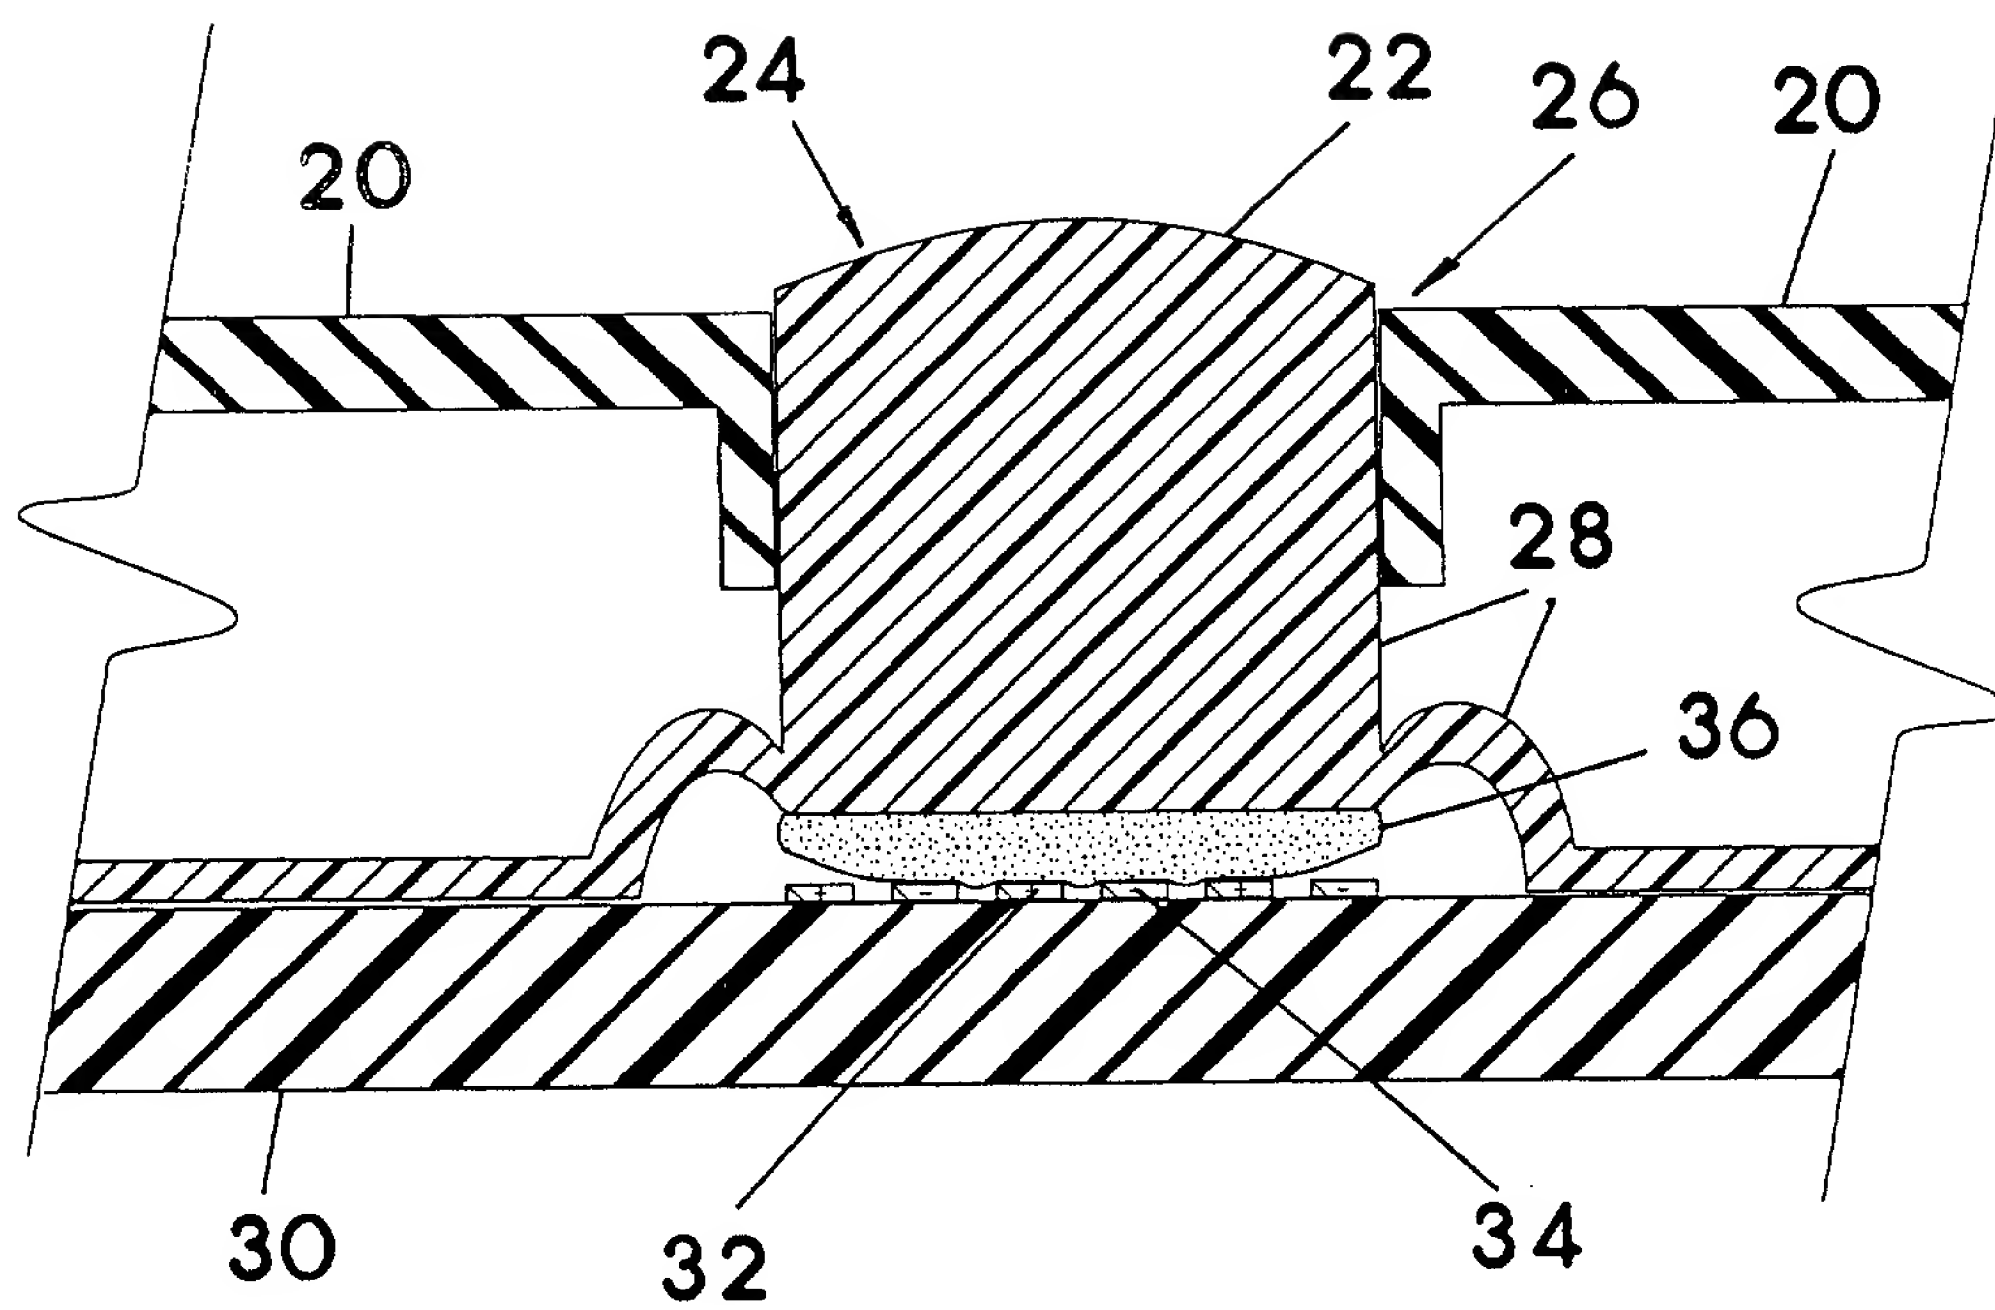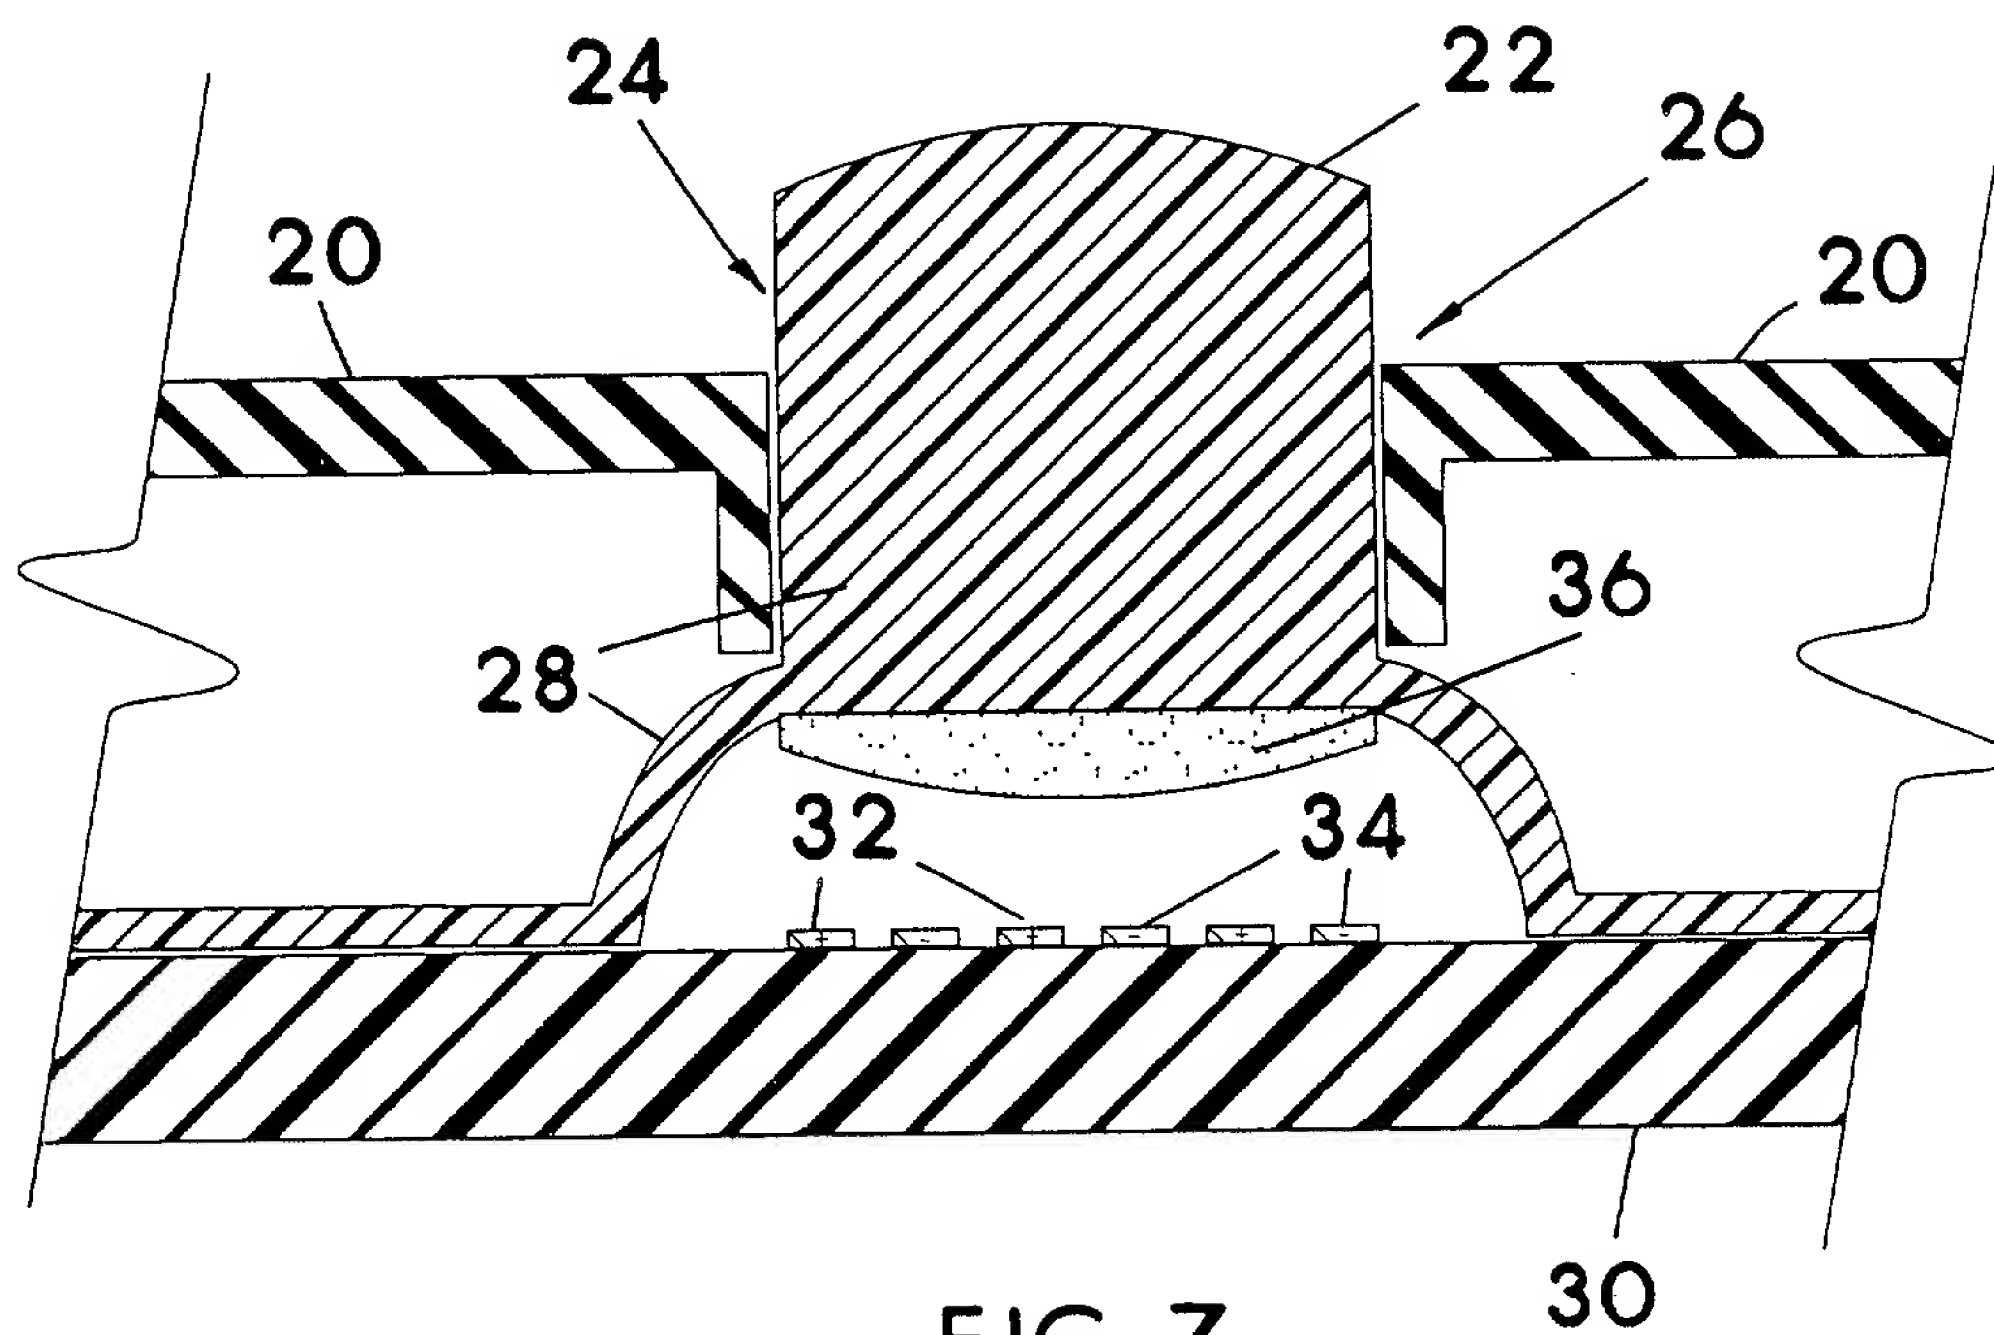




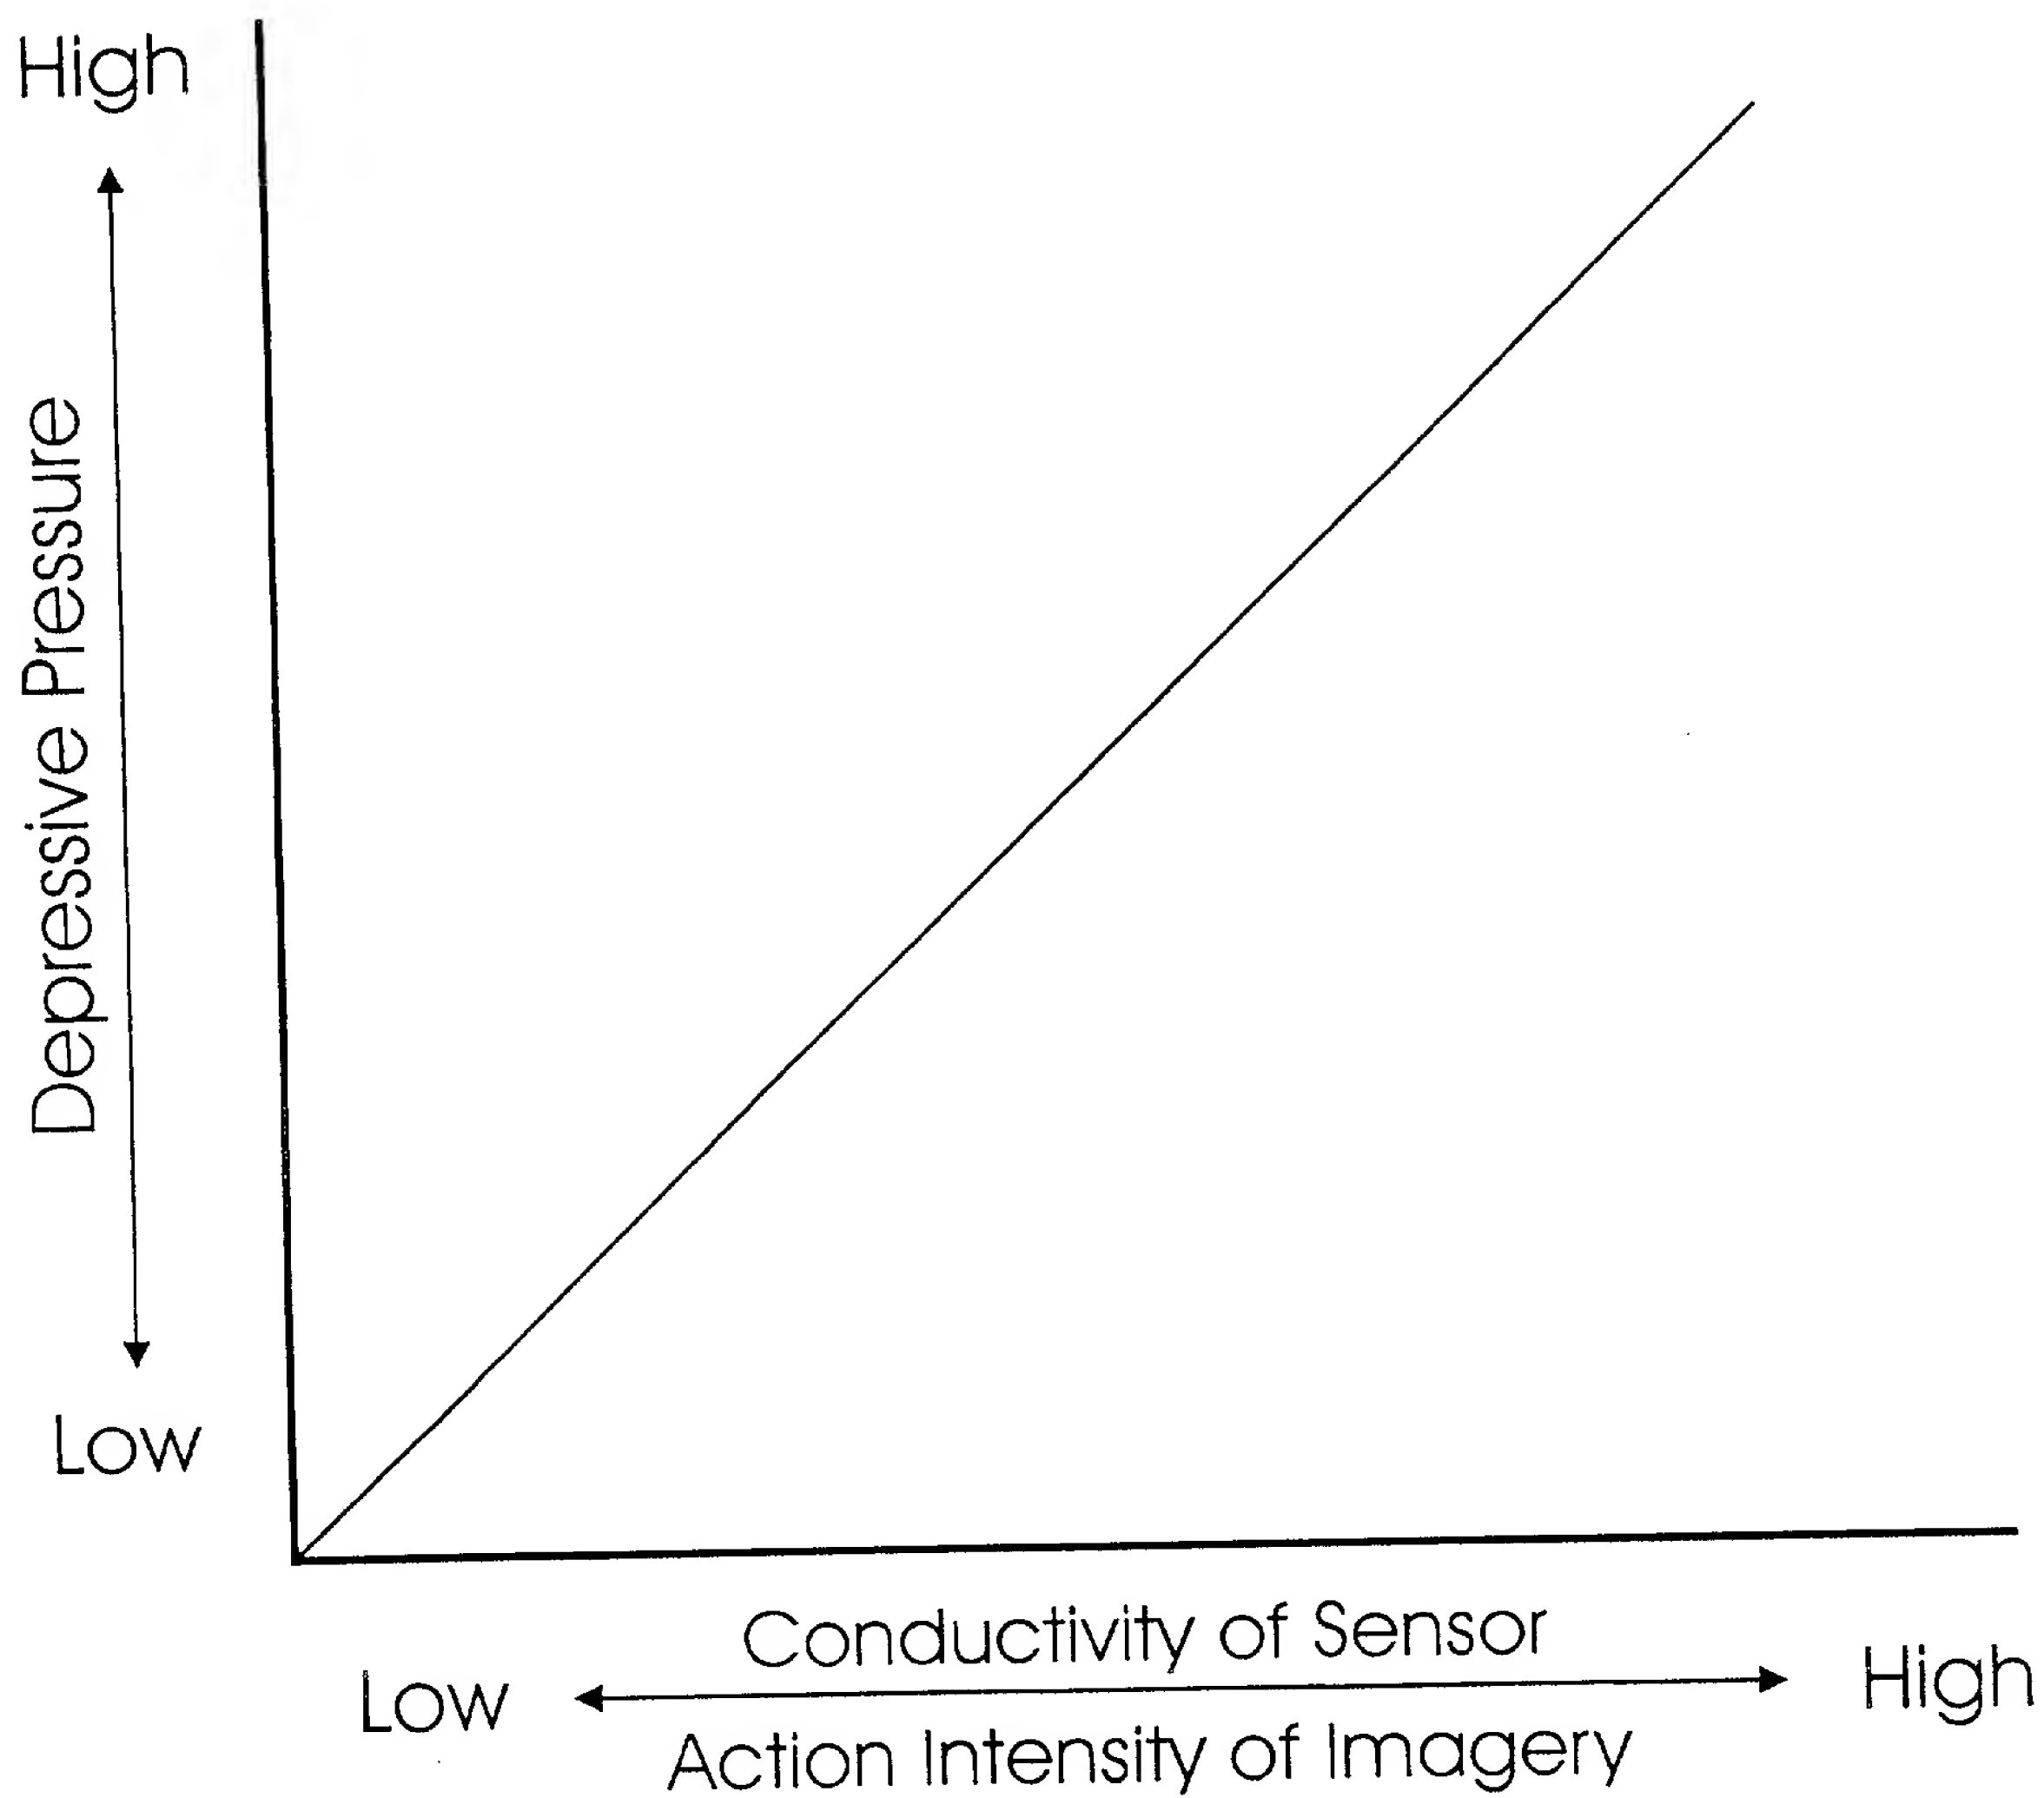


FIG. 10



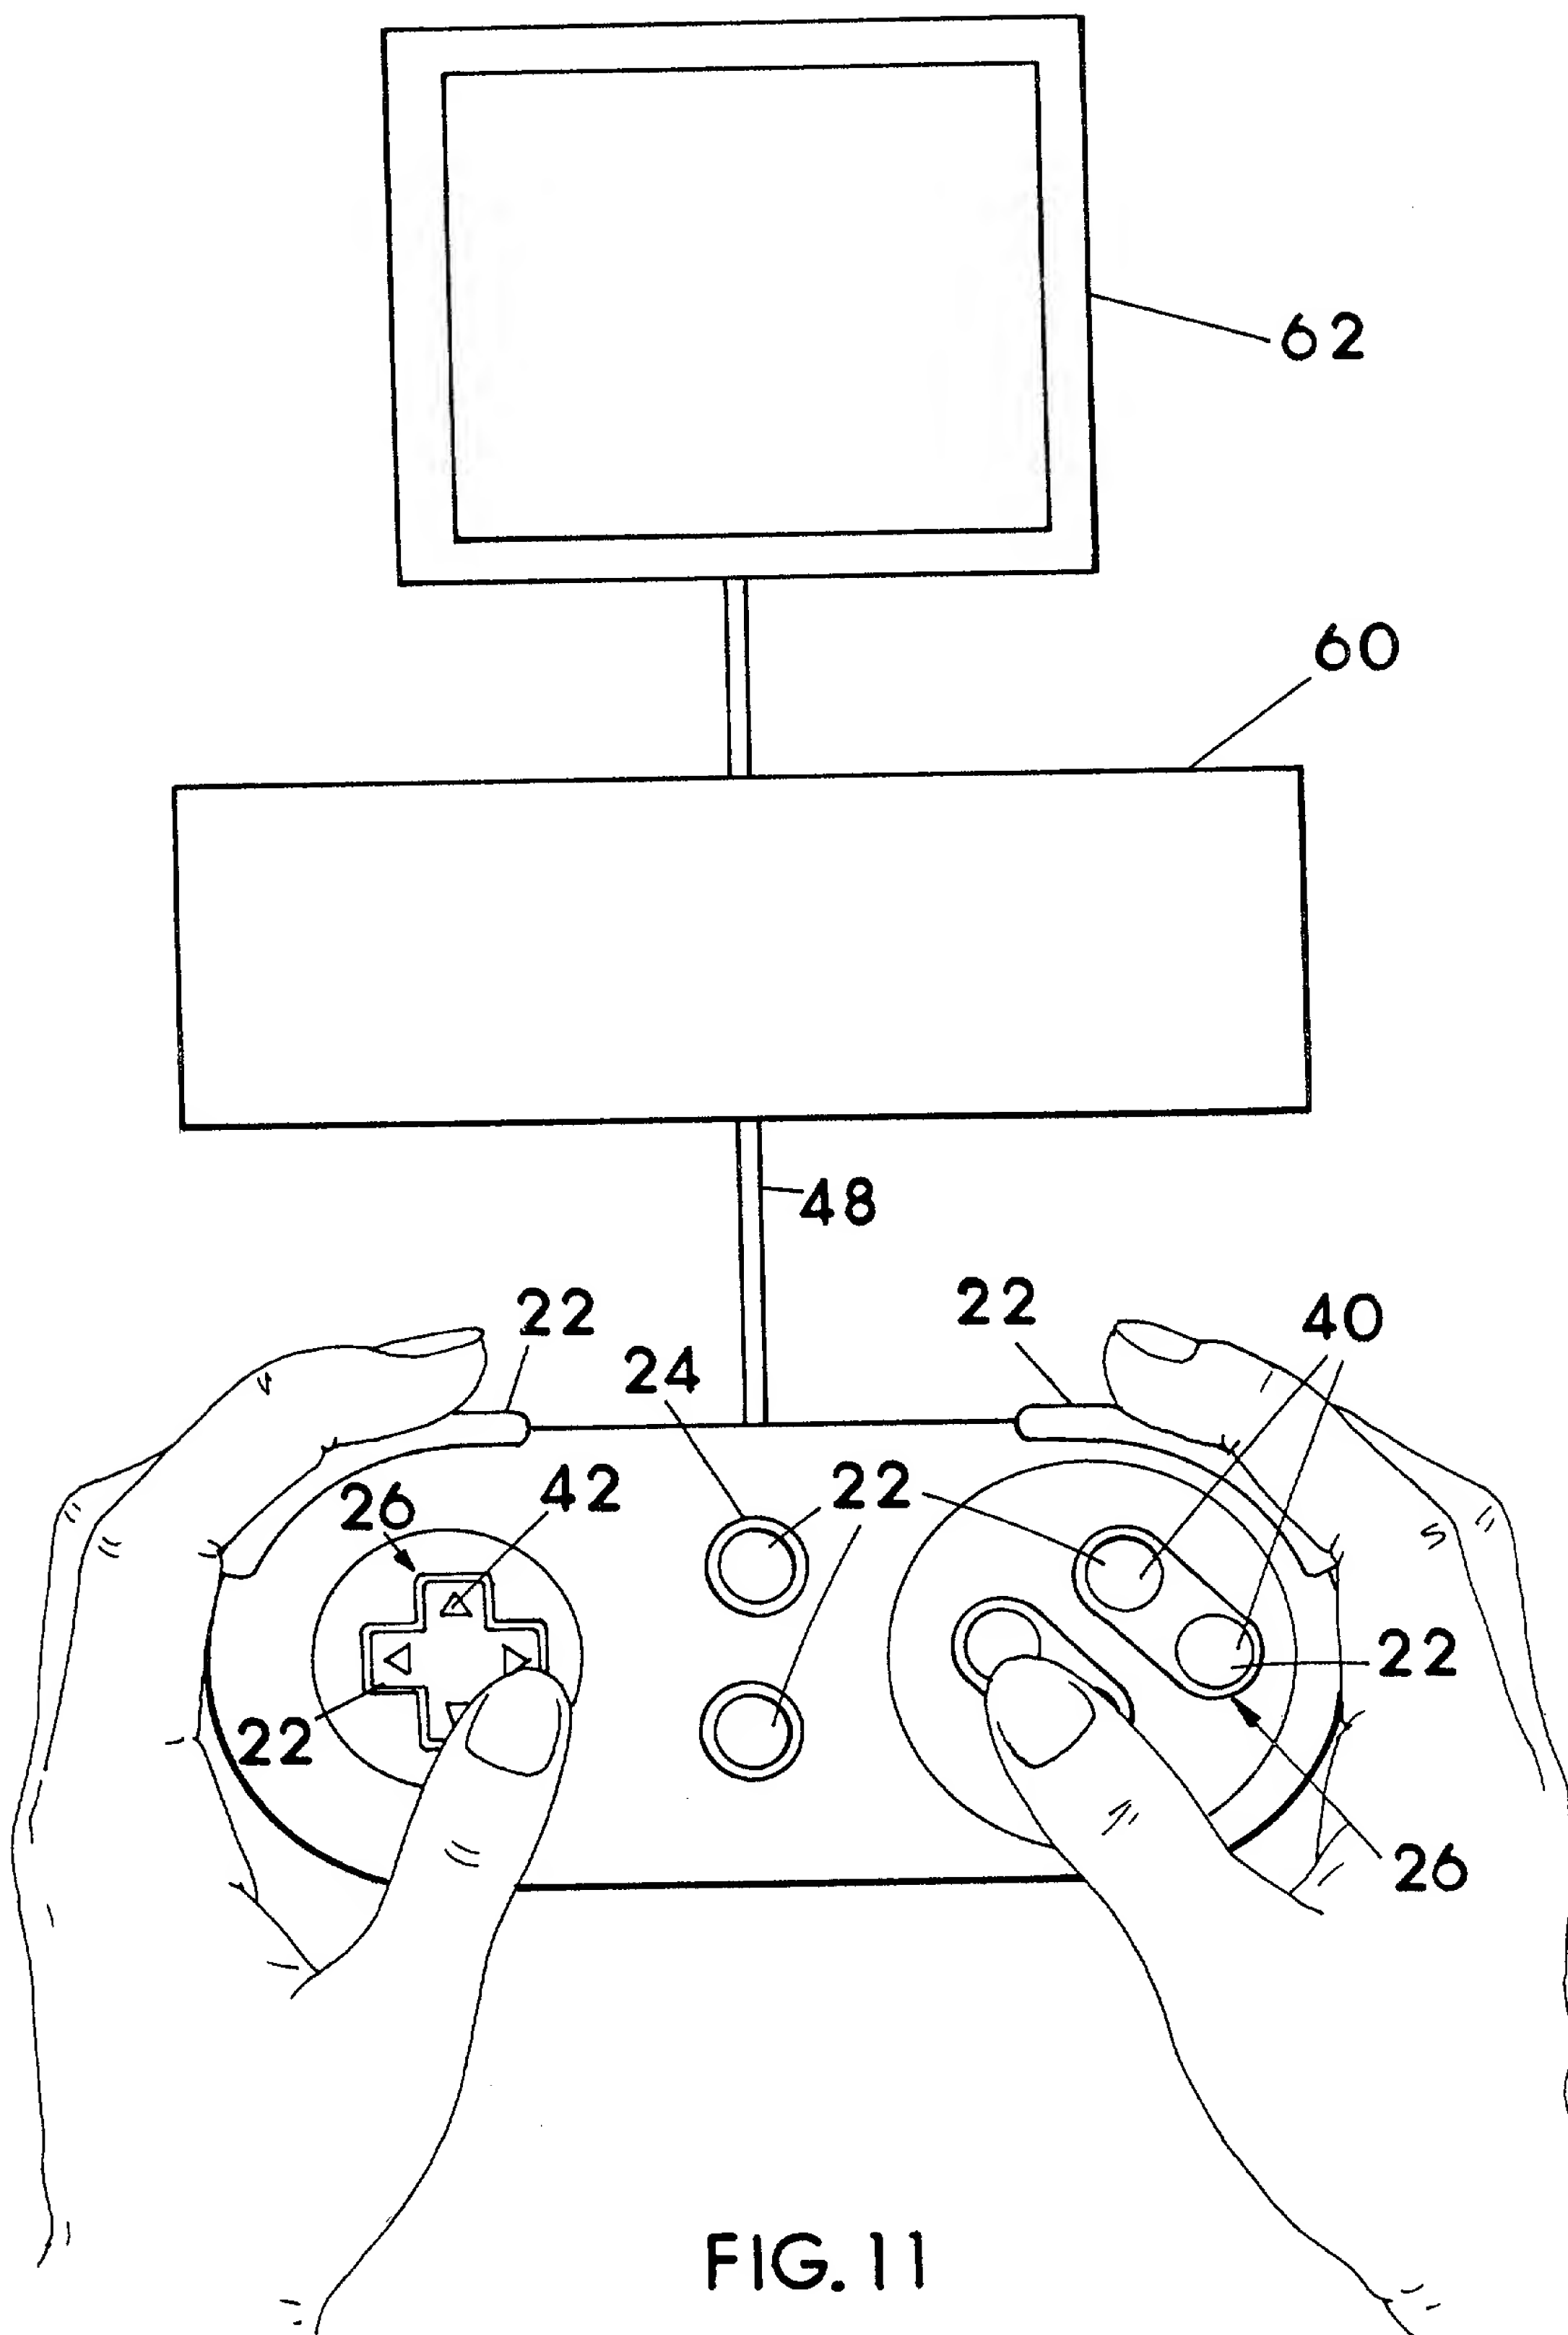

# DECLARATION FOR PATENT APPLICATION

Docket Number (Optional)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled GAME CONTROLLER WITH ANALOG PRESSURE SENSOR(S), the specification of which

is attached hereto unless the following box is checked:

☐ was filed on \_\_\_\_\_ as United States Application Number or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Claimed

☐ Yes ☐ No

(Number) (Country) (Day/Month/Year Filed)

☐ Yes ☐ No

(Number) (Country) (Day/Month/Year Filed)

☐ Yes ☐ No

(Number) (Country) (Day/Month/Year Filed)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Number) (Filing Date) (Status - patented, pending, abandoned)

(Application Number) (Filing Date) (Status - patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: NONE

Address all telephone calls to Brad A. Armstrong at telephone number 916 872 9148

Address all correspondence to Brad A. Armstrong  
P.O. Box 1419  
Paradise, CA 95967

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor (given name, family name) Brad A. Armstrong

Inventor's signature Brad A. Armstrong Date October 1, 1997

Residence Paradise, CA USA Citizenship USA

Post Office Address Brad A. Armstrong, P.O. Box 1419, Paradise, CA 95967

Full name of second joint inventor, if any (given name, family name) \_\_\_\_\_

Second Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

☐ Additional inventors are being named on separately numbered sheets attached hereto.

Applicant or Patentee: Brad A. Armstrong Attorney's  
 Serial or Patent No.: \_\_\_\_\_ Docket No.: \_\_\_\_\_  
 Filed or Issued: \_\_\_\_\_  
 For: GAME CONTROLLER WITH ANALOG PRESSURE SENSOR(S)

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY  
 STATUS (37 CFR 1.9 (f) and 1.27 (b)) — INDEPENDENT INVENTOR

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9 (c) for purposes of paying reduced fees under section 41 (a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled GAME CONTROLLER WITH ANALOG PRESSURE SENSOR(S) described in

☒ the specification filed herewith  
☐ application serial no. \_\_\_\_\_, filed \_\_\_\_\_  
☐ patent no. \_\_\_\_\_, issued \_\_\_\_\_

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9 (c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9 (d) or a nonprofit organization under 37 CFR 1.9 (e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

☒ no such person, concern, or organization  
☐ persons, concerns or organizations listed below\*

\*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

FULL NAME \_\_\_\_\_  
 ADDRESS \_\_\_\_\_  
☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION


FULL NAME \_\_\_\_\_  
 ADDRESS \_\_\_\_\_  
☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

FULL NAME \_\_\_\_\_  
 ADDRESS \_\_\_\_\_  
☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28 (b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Brad A. Armstrong

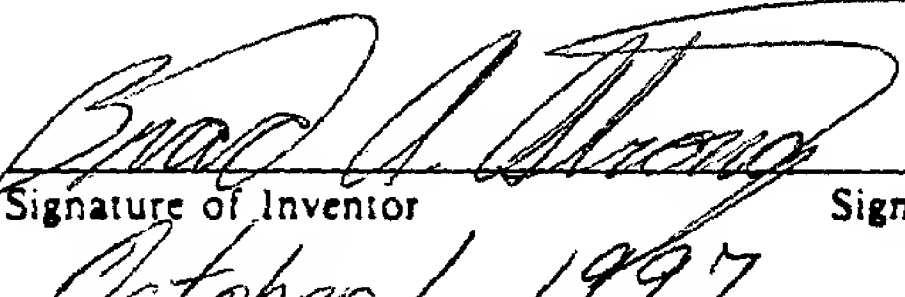NAME OF INVENTOR	NAME OF INVENTOR	NAME OF INVENTOR
		
Signature of Inventor	Signature of Inventor	Signature of Inventor
<u>October 1, 1997</u>		
Date	Date	Date